

# HIKOKI

HIGH PERFORMANCE POWER TOOLS



## Power tools catalogue 2024

[www.hikoki-powertools.co.uk](http://www.hikoki-powertools.co.uk)

Developing innovative technologies in Japan since 1948.


# Contents

## Everything you need for the highest power tool performance.

<b>Introduction</b>	<b>4</b>	<b>Drilling</b>	
<b>HiKOKI Warranty</b>	<b>5</b>	Rotary drills	88
<b>Index</b>	<b>6</b>	Impact drills	90
<b>MultiVolt</b>	<b>10</b>	<b>Demolition</b>	
<b>Cordless</b>		Roatry hammer drills	93
Screwdrivers	12	Rotary demolition hammers	94
Angle drills	13	Demolition hammers	99
Drill/drivers	14	<b>Fastening</b>	
Combi Drills	14	Screwdrivers	103
Impact drivers	17	<b>Sawing</b>	
Impact wrenches	19	Circular saws	104
Hammer drills	22	Mitre saws	105
Angle grinders	28	Jigsaws	108
Routers	33	Reciprocating saws	110
Table saw	34	Multi tool	111
Mitre saws	35	<b>Routing &amp; Planing</b>	
Circular saws	36	Routers	112
Metal cutting saw	41	Planer	113
Jigsaws	42	<b>Sanding &amp; Polishing</b>	
Sanders	45	Random orbit sander	114
Bandsaws	46	Palm sander	114
Reciprocating saws	47	Belt sanders	115
Multi tool	50	Sander polisher	116
Planer	50	<b>Grinding</b>	
Caulking gun	51	Angle grinders	116
Shear	52	<b>Miscellaneous</b>	
Nibbler	52	Die grinder	123
Vibrator	53	Cut-off Machine	123
Mixer	53	Air brad nailer	124
Rebar bender/cutter	54	<b>Concrete cutting</b>	
Cleaners	55	Wall chaser	127
Blower	56		
Nailers & staplers	57		
Radio	63		
Torch / Lighting	64		
Charger	70		
MultiVolt / Li-ion batteries	73		
Mains Adapter	76		
Air duster	72		
Stackable cases	78		
Chainsaw	80		
Hedge trimmer	81		
Kits	83		
Heat gun	86		

# Introduction

## Safety

Double-Insulation power tool, indicated by the double square  can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

## Power input

HiKOKI employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110 to 240V.

## General precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children away from the tool.
4. Wear eye protection to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts are properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at regular intervals by an authorised Service Centre.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Centre for repair and/or part replacement.
15. DO NOT use the power tool for any other application than those specified in the handling instructions.
16. DO NOT use the power tool for work beyond its prescribed capacity.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances except for double insulated tools.

20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in proper clothing and shoes.
25. Always keep the work area in good order.
26. When not in use, store the power tool.
27. DO NOT stare into laser beams.

## Guarantee

Our primary is the convenience and satisfaction of the customer. To this end, each HiKOKI is carefully tested and inspected, and guaranteed against any defects in workmanship and materials. Defects in workmanship and materials (not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling) will be repaired or replaced without charge.

## Notes

1. Koki Holdings reserves the right to change specifications of parts and accessories of HiKOKI power tools without notice.
2. Specifications, features, accessories and parts such as power input, maximum torque, cutting capacity, length, weight brake, hook, spindle thread, chuck, blade, bore and handle, may vary from country to country.
3. Figures of battery capacity nominal values.
4. Standard accessories such as battery, charger, grinding wheel, sanding paper, blade, washer, collet chuck, chuck sleeve, side handle, dust collection adapter, protective items, wrench and carrying case, sometimes may vary from country to country. Some standard accessories may be excluded from country to country.
5. Please state required voltage and specifications when you order.
6. Orders are subject to product-availability in each country.
7. Some models in this catalogue are shown with optional accessories and fasteners such as screw, nail, bit, socket, blade, battery and grinding wheel.
8. Actual colours of products may differ from those in printed photos of this catalogue.



# Hi5 WARRANTY

## Introducing the new HiKOKI Power Tools Hi5 extended 5 year warranty

You can register your cordless brushless power tools for an extra 2 years over the automatic 3 years heavy duty warranty

### Available on:

- 18V cordless brushless tools
- 36V (Multi Volt) cordless brushless tools
- Batteries over 4.0Ah, including Multi Volt batteries

Online registration is required within 4 weeks of purchase

[www.hikoki-powertools.co.uk](http://www.hikoki-powertools.co.uk)

# Index

A place for everything and everything in its place.

<b>123</b>		CS3630DB	80	G3613DVE	30	SV13YA	114
712650	107	CV18DA	50	G3613DVF	31	SV1813DA	45
		CV350V	111	G3615DVE	31		
<b>A</b>				G3623DA	32	<b>U</b>	
AC18DA	51	<b>D</b>		GP18DA	32	UB18DA	64
		DN18DSL	13	GP252	123	UR18DB	64
<b>B</b>		DS18DSL	13			UB18DC	65
BSL36A18	73	DS36DC	13	<b>H</b>		UB18DD	65
BSL36B18	74	DV36DYA	14	H41MB2	99	UB18DE	66
BSL1850	73	DV18DC	14	H45MEY	99	UB18DF	67
BSL1850C	74	DV18DE	14	H60MC	100	UB18DG	67
BSL1820M	75	DH18DBL	26	H60MEY	100	UB18DH	68
BSL1840M	75	DH18DPB	24	H655D3	101	UB18DGL	68
BSL1850MA	76	DH18DPC	24	H905G	102	UB18DJL	69
		DH1826DA	23			UC18YFSLJEZ	70
<b>C</b>		DH1826DC	27	<b>K</b>		UC18YFSLJFZ	70
C75B3	104	DH3628DC	25	KC18DCJAZ	83	UC18YSL3JEZ	71
C7ST	103	DH3640DA	26	KC18DCJCZ	83	UC18YSL3JFZ	71
C7U3	104	DH36DPE	26	KC18DDEJAZ	84	UC18YSL3JGZ	72
C8FSHG	105	DH36MA	27	KC18DFXJAZ	85	UC18YTSL	72
C8FSE	106	D65H	88			UM36DA	53
C9U3	105	D10VC3	88	<b>M</b>		UR18DA	63
C10FCE2	106	D10VF	89	M8V2	112	UR18DSL	63
C12RS2	107	D13VF	89	M12VE	112	UV3628DA	53
C1806DA	36	D13	90	M1808DA	33		
C1806DB	37	DV18V	91	M3612DA	33	<b>V</b>	
C1807DA	37	DV20VB2	92			VB3616DA	54
C3605DYA	38	DV20VD	92	<b>N</b>			
C3606DB	38	DH26PX2	93	N18DSL	58	<b>W</b>	
C3606DPA	39	DH28PX2	93	NH18DSL	62	W6VB3	103
C3606DUM	39	DH40MC	94	NP18DSAL	58	W18DA	12
C3607DB	40	DH40MEY2	94	NR1890C	59	W18DB	12
C3607DRA	35	DH45MA	97	NR3675DD	59	WF18DSL	12
C3610DRA	35	DH45ME	97	NT1850DF	62	WH18DA	17
C3610DRJ	34	DH52ME	98	NT1865DMA	60	WH18C	18
CB18DBL	46	DH52MA	98	NT1865DMB	60	WH18DE	18
CB3612DA	46	DV16V	91	NT1865DM	61	WH36DC	17
CC145F	123			NT50AE2	124	WR36DA	19
CD3605DB	41	<b>E</b>				WR36DB	19
CE18DSL	52	ET36A	76	<b>P</b>		WR36DE	20
CG36DB	81			P18DSL	50	WR36DF	20
CH3656DA	80	<b>G</b>		P20SF	113	WR36DG	21
CJ18DA	42	G10SR4	116			WR36DH	21
CJ18DB	42	G12STX	117	<b>R</b>			
CJ36DA	43	G12STX/CD	117	R18DB	55		
CJ36DB	43	G12SR4	118	R18DSL	55		
CJ90VST2	108	G12SN2	118	RA18DA	77		
CJ110MV	108	G12SE3	119	RB18DC	56		
CJ160V	109	G13SE3	119	RH18DA	86		
CM5MA	127	G18SE4	120	RB36DA	82		
CN18DSL	52	G23ST	120	RB36DB	58		
CR13V2	110	G23ST/CD	121				
CR13VBY	110	G23ST/G12STX	121	<b>S</b>			
CR18DA	47	G23SC4	122	SB8V2	115		
CR18DBL	48	G23MR	122	SB10V2	115		
CR18DMA	48	G1812DA	29	SB3608DA	45		
CR18DSL	49	G1812DE	29	SP18VA	116		
CR36DA	49	G3612DVE	30	SV125G	114		



# HIKOKI

HIGH PERFORMANCE POWER TOOLS

# Driven by Technology.

It's our belief that innovation never stops. We make each power tool development better in every single way. Smart engineering means higher power and a longer lifetime for faster operations, less maintenance and greater comfort. Our aim is to continually improve the performance of those working in construction and make building sites safer and healthier. Today and tomorrow.






# One battery that powers over 110 tools.

Our innovative MULTI VOLT battery powers a wide range of cordless power tools. Moreover, this battery is compatible with both 36V and 18V power tools, and it's even backwards compatible with your Hitachi power tool(s). Now you are able to cut, grind, drill, mow, blow, chop and trim with the same power as corded power tools, but with the ultimate freedom of working wherever you want.



36V ← → 18V

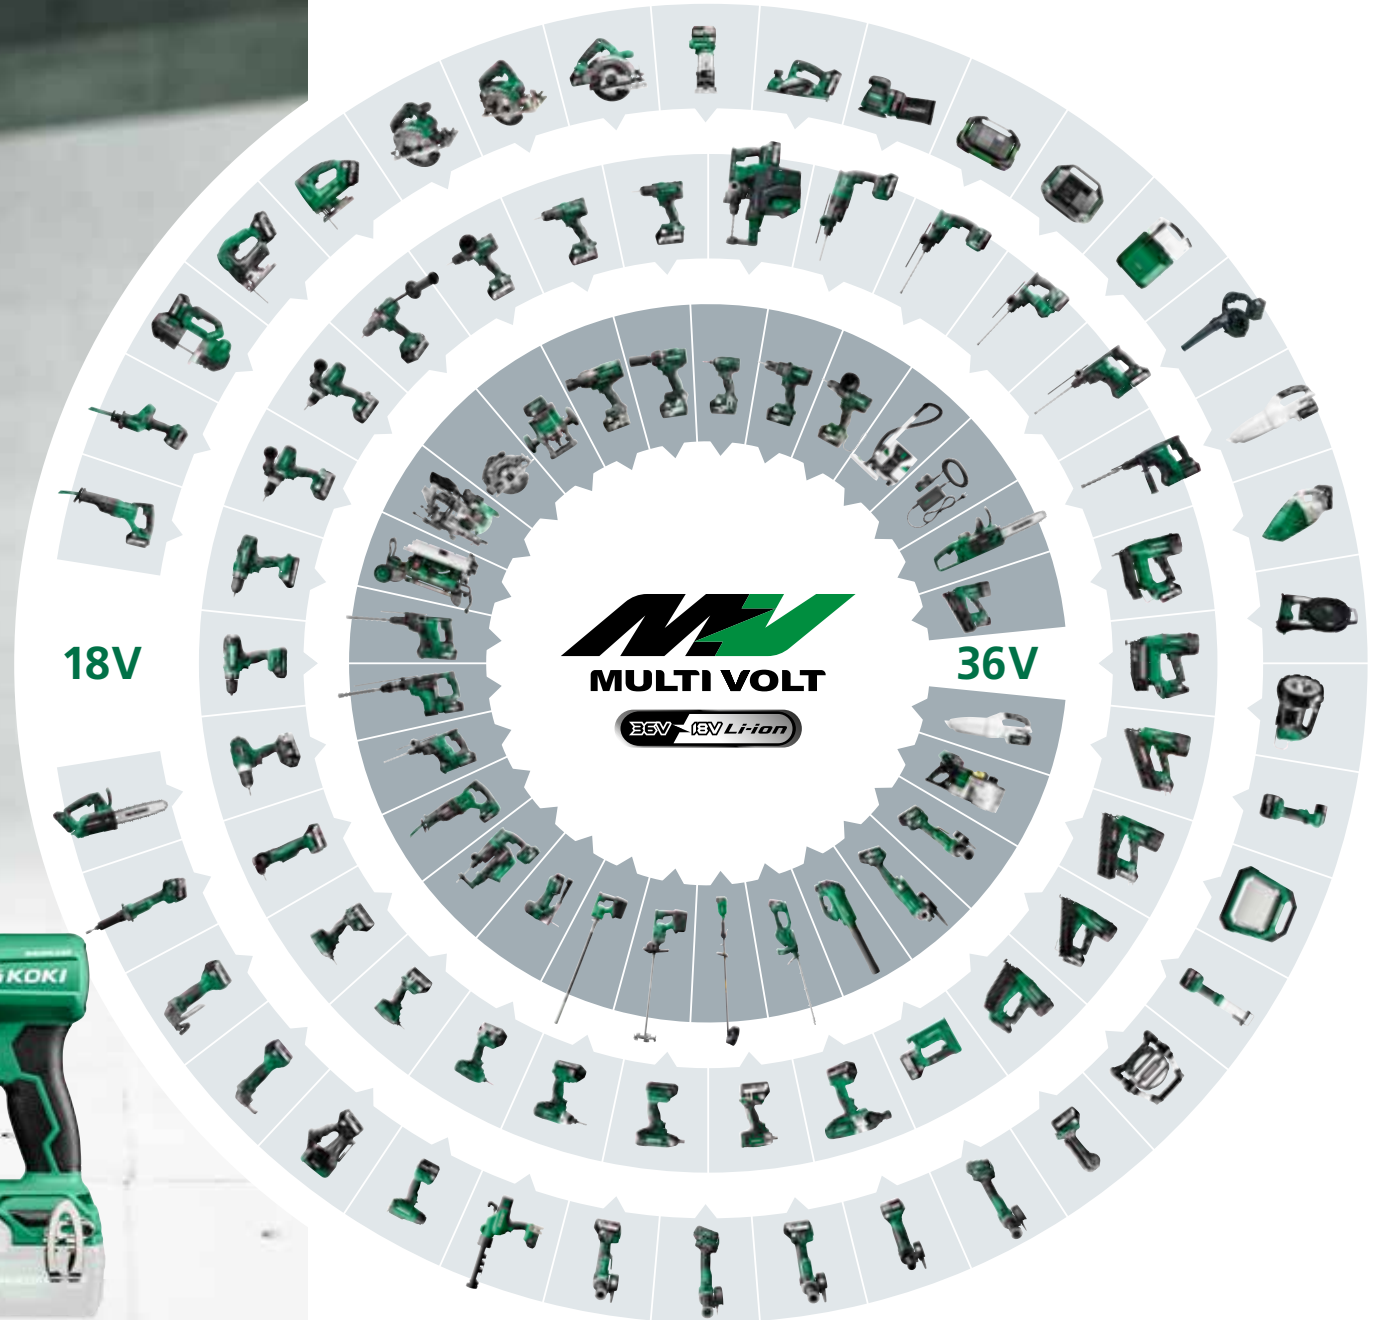

**W18DA**  
18V Screwdriver

**NEW**



Specifications	
Drive	6.35mm (1/4") hex bit shank
Capacity: Screw size	4mm
Capacity: Screw length	57mm (with magazine)
Battery voltage	18V
No load speed	0 - 5000/min
Overall length	246mm
Weight	1.4kg with BSL1820M

Variant	Voltage	Contents	Case	GTIN
<b>W18DAW3Z</b>	18V	Body only + Autofeed magazine	HSC3	4966376403837

Batteries + Screws not included

**W18DB**  
18V Screwdriver

**NEW**



Specifications	
Drive	6.35mm (1/4") hex bit shank
Capacity: Screw size	4mm
Capacity: Screw length	57mm (with magazine)
Battery voltage	18V
No load speed	0 - 3000/min
Overall length	256mm
Weight	1.5kg with BSL1820M

Variant	Voltage	Contents	Case	GTIN
<b>W18DBW3Z</b>	18V	Body only + Autofeed magazine	HSC3	4966376403950

Batteries + Screws not included

**DN18DSL**  
18V Angle Drill



Specifications	
Drill Chuck	10mm
Head height	88mm
Centre height	23mm
Max. Mild Steel	10mm
Max. Soft Wood	28mm
Max. Wood Screw	5.1 x 38mm
Battery voltage	18V
No load speed	0-1800/min
Max. Torque (hard)	12Nm
Overall length	362mm
Weight	1.7kg with BSL1820M

Variant	Voltage	Contents	Case	GTIN
<b>DN18DSL4Z</b>	18V	18V Angle Drill - Body only + belt hook	Carton	4966376308507

**DV36DC**  
36V MultiVolt Brushless Impact Drill/Driver

**NEW**



**Compatible**  
**BRUSHLESS**

Specifications	
Battery Voltage	36V
Drill chuck	1.5-13mm keyless
Max. Brick	22mm
Max. Mild Steel	20mm
Max. Soft Wood	118mm
Max. Wood Screw (DxL)	16 x 100mm
Max. Machine Screw	6mm
No load speed	0-550/min / 0-2200/min
Max. Torque (Hard / Soft Joint)	155Nm / 100Nm
Slip Torque Stages	22
Impact Rate	0 - 33000/min
Dimensions (LxWxH)	190 x 267 x 70mm
Weight	2.8kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
<b>DV36DCJRZ</b>	36V	2 x 5.0Ah Li-ion batteries + UC18YSL3 charger + side handle + belt hook + driver bit	HSC2	4966376405411
<b>DV36DCW2Z</b>	36V	Body only + side handle + driver bit + belt hook	HSC2	4966376405411

### DV18DC

18V Brushless Impact Drill/Driver

NEW



**NEW** Compatible  
**BRUSHLESS**

Specifications	
Battery Voltage	18V
Drill chuck	1.5-13mm keyless
Max. Brick	20mm
Max. Metal	16mm
Max. Soft Wood	102mm
Max. Wood Screw (DxL)	12 x 100mm
Max. Machine Screw	6mm
No load speed	0-500/min / 0-2000/min
Max. Torque (Hard / Soft Joint)	140Nm / 70Nm
Slip Torque Stages	22
Impact Rate	0 - 33000/min
Dimensions (LxWxH)	190 x 267 x 70mm
Weight	2.8kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DV18DCRZ	18V	2 x 5.0Ah Li-ion batteries + UC18YSL3 charger + side handle + driver bit + belt hook	HSC2	4966376405220
DV18DCWZ2	18V	Body only + side handle + driver bit + belt hook	HSC2	4966376405190

### DV18DE

18V Brushless Impact Drill/Driver

NEW



**NEW** Compatible  
**BRUSHLESS**

Specifications	
Drill chuck	1.5 - 13mm keyless
Max. Wood	52mm
Max. Steel	13mm
Max. Masonry	13mm
Battery voltage	18V
No load speed	0-550/min / 0-2000/min
Impact rate	0-30000/min
Max. Torque (Hard)	70Nm
Overall length	159mm
Weight	1.9kg with BSL1850M

Variant	Voltage	Contents	Case	GTIN
DV18DEWZ2	18V	2 x 3.0Ah Li-ion batteries + UC18YSFL charger + side handle + driver bit + belt hook	HSC2	4966376404780

### D36DYA

36V Brushless Angle Drill

NEW



**NEW** Compatible  
**BRUSHLESS**

Specifications	
Battery Voltage	36V
Drill chuck	1.5-13mm keyless
Max. Metal	13mm
Max. Wood (Holesaw)	159mm
Max. Wood (Sinking)	118mm
No load speed (low/High)	0 - 400/min / 0 - 1500/min
Max. Torque	250Nm
Slip Torque Stages	22
Impact Rate	0 - 33000/min
Dimensions (LxWxH)	664 x 198 x 95mm
Weight	5.7kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
D36DYAWZ4	36V	Body only + side handle	X	4966376411184

Batteries + Holesaw not included

## Notes



# Impact tools



## WH36DC 36V Brushless Impact Driver

**NEW**

**NEW** Compatible  
**BRUSHLESS**



Specifications	
Max. Bolt	5-18mm
Max. HT Bolt	5-14mm
Max. Self Drilling Screw	Ø 3.5-6mm
Tightening Torque	215Nm (Power Mode)
Bit Shank Size	6.35mm (1/4") hex bit shank
Battery voltage	36V
No load speed	0-3400/min (Power Mode) 0-900/min (Soft Mode)
Full Load Impact rate	0-4100/min (Power Mode) 0-2000/min (Soft Mode)
Dimensions (LxH)	114 x 241mm
Weight	1.6kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
WH36DCW2Z	36V	Body only + belt hook	HSC2	4966376401246

## WH18DA 18V Brushless Impact Drill/Driver

**NEW**

**NEW** Compatible



Specifications	
Max. Bolt	M6 - M14
Max. HT Bolt	M6 - M12
Max. Machine Screws	4 - 8mm
Max. Torque	140 Nm
No load speed	0 - 2700 /min
Battery voltage	18V
Impact rate	0 - 3600 /min
Length	150mm
Weight	1.3kg with BSL1820M

Variant	Voltage	Contents	Case	GTIN
WH18DAW4Z	18V	Body only + belt hook	X	4966376400737

Batteries not included

**WH18DC**  
18V Brushless Impact Drill/Driver

**NEW**



Specifications	
Max. Bolt	5-18mm
Max. HT Bolt	5-14mm
Max. Self Drilling Screw	Ø 3.5-6mm
Tightening Torque	210Nm (Power Mode)
Bit Shank Size	6.35mm (1/4") hex bit shank
Battery voltage	18V
No load speed	0-3400/min (Power Mode) 0-900/min (Soft Mode)
Full Load Impact rate	0-4000/min (Power Mode) 0-1900/min (Soft Mode)
Dimensions (LxH)	114 x 241mm
Weight	1.6kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
WH18DCW2Z	18V	Body only + belt hook	HSCII	4966376402946

Batteries not included

**WH18DE**  
18V Brushless Impact Drill/Driver

**NEW**



Specifications	
Max. Screw	M4-M8
Max. Bolt	M5-M16
Max. HT Bolt	M5-M12
Battery voltage	18V
No load speed	0-3100/min
Full Load Impact rate	0-3400/min
Max. Tightening Torque	175Nm
Sound Pressure Level	73.7 dB
Head length	120mm
Weight	1.6kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
WH18DEW2Z	18V	Body only + belt hook	HSC2	4966376403066

Batteries not included

**WR36DA**  
36V MultiVolt Brushless Impact Wrench



Specifications	
Max. Bolt	M12 - M30
Max. HT Bolt	M10 - M24
Drive	19mm (3/4") square
Tightening Torque	1100Nm
Battery voltage	36V
No load speed:	
High / Medium mode	0-1500/min / 0-1200/min
Low 2 / Low 1 mode	0-900/min / 0-600/min
Full Load Impact rate:	
High / Medium mode	0-2900/min / 0-2300/min
Low 2 / Low 1 mode	0-1800/min / 0-1200/min
Overall length	221mm
Weight	3.7kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
WR36DAJ4Z	36V	Body only + belt hook	X	4966376323555

Socket bit not included

**WR36DB**  
36V MultiVolt Brushless Impact Wrench



Specifications	
Max. Bolt	M12 - M30
Max. HT Bolt	M10 - M24
Drive	12.7mm (1/2") square
Tightening Torque	1050Nm
Battery voltage	36V
No load speed:	
High / Medium mode	0-1500/min / 0-1200/min
Low 2 / Low 1 mode	0-900/min / 0-600/min
Full Load Impact rate:	
High / Medium mode	0-2800/min / 0-2300/min
Low 2 / Low 1 mode	0-1800/min / 0-1200/min
Overall length	221mm
Weight	3.7kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
WR36DBJ4Z	36V	Body only + belt hook	X	4966376323746

Socket bit not included

**WR36DE**  
36V MultiVolt Brushless Impact Wrench



Specifications

Max. Bolt / HT Bolt	M10 - M24 / M10 - M20
Drive	12.7mm (1/2") square
Tightening Torque	770Nm
Battery voltage	36V
No load speed:	
High / Medium mode	0-2400/min / 0-2100/min
Low 2 / Low 1 mode	0-1800/min / 0-1500/min
Full Load Impact rate:	
High / Medium mode	0-3400/min / 0-3000/min
Low 2 / Low 1 mode	0-2600/min / 0-2200/min
Overall length	169mm
Weight	2.6kg with BSL36A18

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>WR36DEWZ2</b>	36V	Body only + belt hook	HSC2	4966376129829

Socket bit not included

**WR36DG**  
36V MultiVolt Brushless Impact Wrench

**NEW**



Specifications

Max. Bolt	M12 - M33
Max. HT Bolt	M10 - M27
Drive	12.7mm (1/2") square
Tightening Torque	1400Nm
Loosening Torque	2100Nm
Battery voltage	36V
No load speed:	
Mode 4 / Mode 3	0-1500/min / 0-1200/min
Mode 2 / Mode 1	0-900/min / 0-600/min
Full Load Impact rate:	
Mode 4 / Mode 3	0-2600/min / 0-2200/min
Mode 2 / Mode 1	0-1900/min / 0-1600/min
Dimensions (L x H)	221 x 290mm
Weight	3.9kg with BSL36A18

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>WR36DGWZ2</b>	36V	Body only + belt hook	HSC3	496637407774

**WR36DF**  
36V MultiVolt Brushless Impact Wrench

**NEW**



Specifications

Max. Bolt	M12 - M36
Max. HT Bolt	M10 - M27
Drive	3/4"
Tightening Torque	1900Nm
Loosening Torque	2400Nm
Battery voltage	36V
No load speed:	
Mode 4 / Mode 3	0-1500/min / 0-1200/min
Mode 2 / Mode 1	0-900/min / 0-600/min
Full Load Impact rate:	
Mode 4 / Mode 3	0-2600/min / 0-2200/min
Mode 2 / Mode 1	0-1900/min / 0-1600/min
Dimensions (L x H)	221 x 290mm
Weight	3.9kg

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>WR36DFWZ2</b>	36V	Body only + belt hook	HSC3	4966376407644

**WR36DH**  
36V MultiVolt Brushless Impact Wrench

**NEW**



Specifications

Max. Bolt	M12 - M20
Max. HT Bolt	M10 - M16
Drive	12.7mm (1/2") square
Tightening Torque	380Nm
Battery voltage	36V
No load speed:	
High / Medium mode	0-3000/min / 0-2400/min
Low / Single mode	0-1200/min / 0-1800/min
Full Load Impact rate:	0-4100/min
Overall length	144mm
Weight	2.0kg with BSL36A18

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>WR36DHWZ2</b>	36V	Body only + belt hook	X	4966376410644





# Cordless Hammers

## DH18DPA 18V SDS Plus Hammer Drill



**LVH**  
Compatible  
**BRUSHLESS**

Specifications	
Max. Concrete	18mm
Max. Metal	13mm
Max. Wood	18mm
Bit Shank	SDS-Plus
Battery voltage	18V
No load speed:	0-800 / 0-1080/min
Impact Rate:	0-4100 / 0-5500/min
Impact Energy:	1.3 Joules
LED light	YES
Overall length	252mm
Weight	2.3kg with BSL1850C

**Built in AUTOSTOP for Dill hole depth consistency**

Variant	Voltage	Contents	Case	GTIN
DH18DPAJ3Z	18V	Body only + side handle + depth gauge	HSC2	4966376332816

## DH1826DA 18V SDS Plus Hammer Drill

**NEW**



**RFC  
LVP**  
Compatible  
**BRUSHLESS**

Specifications	
Max. Concrete	26mm
Max. Mild Steel	13mm
Max. Wood	27mm
Bit Shank	SDS-Plus
Battery voltage	18V
No load speed: (Low/Normal)	0-700/min / 0-950/min
Impact Rate: (Low/Normal)	0-3170/min / 0-4300/min
Impact Energy:	3.2 J
Dimensions (LxWxH)	358 x 91 x 233mm
Weight	3.7kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DH1826DAW2Z	18V	Body only + side handle + depth gauge	HSC4	4966376405916



**DH18DPB**  
18V Brushless SDS Plus Hammer Drill (Pistol)

**NEW**



**Compatible**  
**BRUSHLESS**

Specifications	
Max. Concrete	18mm
Max. Mild Steel	13mm
Max. Wood	18mm
Bit Shank	SDS-Plus
Battery voltage	18V
No load speed: (Normal/Low)	0-800/min / 0-1080/min
Impact Rate: (Normal/Low)	0-4100/min / 0-5500/min
Impact Energy:	1.3 J
LED light	YES
AUTOSTOP	YES
Dimensions (LxWxH)	235 x 84 x 271mm
Weight	2.1kg with BSL1850C

Variant	Voltage	Contents	Case	GTIN
DH18DPBJ4Z	18V	Body only + side handle + depth gauge	X	4966376336869

**DH3628DA**  
36V SDS Plus Hammer Drill

**NEW**



**RFC**  
**UVP**  
**LVH**  
**Compatible**  
**BRUSHLESS**

Specifications	
Max. Concrete	28mm
Max. Mild Steel	13mm
Max. Wood	32mm
Bit Shank	SDS-Plus
Battery voltage	36V
No load speed: (Low/Normal)	0-700/min / 0-950/min
Impact Rate: (Low/Normal)	0-3170/min / 0-4300/min
Full-load Vibration Level	12.1 m/s
Impact Energy:	3.2 J
Dimensions (LxWxH)	358 x 91 x 233mm
Weight	3.9kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DH3628DAW2Z	36V	Body only + side handle + depth gauge	HSC4	4966376405572

**DH18DPC**  
18V Brushless SDS Plus Hammer Drill (Pistol)

**NEW**



**Compatible**  
**BRUSHLESS**

Specifications	
Max. Concrete	26mm
Max. Mild Steel	13mm
Max. Wood	27mm
Bit Shank	SDS-Plus
Battery voltage	18V
No load speed: (Normal/Low)	0-950/min / 0-700/min
Impact Rate: (Normal/Low)	0-4300/min / 0-3170/min
Impact Energy:	3.2 J
Selective operation modes	3
DRilling holes per charge	Ø12 x 40mm - 73
Dimensions (LxWxH)	368 x 276x 83mm
Weight	3.46 kg excl. battery

Variant	Voltage	Contents	Case	GTIN
DH18DPCW2Z	18V	Body only + side handle + depth gauge	HSC4	4966376334797

**DH3628DC**  
36V SDS Plus Hammer Drill

**NEW**



**RFC**  
**UVP**  
**LVH**  
**Compatible**  
**BRUSHLESS**

Specifications	
Max. Concrete	28mm
Max. Mild Steel	13mm
Max. Wood	32mm
Bit Shank	SDS-Plus
Battery voltage	36V
No load speed: (Low/Normal)	0-700/min / 0-950/min
Impact Rate: (Low/Normal)	0-3170/min / 0-4300/min
Full-load Vibration Level	12.1 m/s
Impact Energy:	3.2 J
Dimensions (LxWxH)	389 x 91 x 232mm
Weight	4.1kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DH3628DCW2Z	36V	Body only + side handle + depth gauge with SDS Plus & Keyless Drill chucks	HSC4	4966376405749

**DH36DPE**  
36V MultiVolt SDS Plus Hammer Drill (Pistol)



**UVP**  
**Compatible**  
**BRUSHLESS**

Specifications	
Max. Concrete	28mm
Max. Steel	13mm
Max. Wood	32mm
Bit Shank	SDS-Plus
Battery voltage	36V
No load speed: (Normal/Low)	0-950 / 0-700/min
Impact Rate: (Normal/Low)	0-4300 / 0-3170/min
Impact Energy:	3.2 Joules
LED light	YES
AUTOSTOP	YES
Overall length	368mm
Weight	3.6kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DH36DPEJRZ	36V	2 x BSL36A18 MV Batteries + side handle + depth gauge	HSC3	4966376334889
DH36DPEJ3Z	36V	Body only + side handle + depth gauge	HSC3	4966376334872



**DH3640DA**  
36V MultiVolt SDS Max Hammer Drill

**NEW**



**UVP**  
**Compatible**  
**BRUSHLESS**

Specifications	
Max. Drill Bit	40mm
Max. Core Bit	105mm
Bit Shank	SDS-MAX
Battery voltage	36V
No load speed:	500/min
Full Impact Rate:	2800/min
Impact Energy:	9.2 Joules
Low vibration handle	YES
Continuous operation	YES
Kickback control	YES
Dimensions (LxHxW)	510 x 260 x 1058mm
Weight	7.4kg with BSL36A18

Variant	Voltage	Contents	Case	GTIN
DH3640DAW2Z	36V	Body only + side handle + depth gauge	BM	4966376407989

Batteries not included

**DH36DMA**  
36V MultiVolt SDS Max Hammer Drill



**LVH**  
**Compatible**  
**BRUSHLESS**

Specifications	
Max. Drill Bit	40mm
Max. Core Bit	105mm
Bit Shank	SDS-MAX
Battery voltage	36V
No load speed:	260-590/min
Full Impact Rate:	1420-2860/min
Impact Energy:	8.5 Joules
Overall length	496mm
Weight	7.9kg with BSL36B18

Variant	Voltage	Contents	Case	GTIN
DH36DMAJ3Z	36V	Body only + side handle + depth gauge	BM	4966376307630

# Cordless Grinders

## G1812DA 18V Brushless Angle Grinder

**NEW**



Specifications	
Wheel Diameter	115mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	18V (Corded equivalent 750W)
No load speed:	8000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Overall length	358mm
Weight	2.7kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>G1812DAW4Z</b>	18V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	X	4966376407064

## G1812DE 18V Brushless Angle Grinder

**NEW**



Specifications	
Wheel Diameter	115mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	18V (Corded equivalent 750W)
No load speed:	8000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.0kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>G1812DEW4Z</b>	18V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	X	4966376407279



**G3612DVE**  
36V Brushless Angle Grinder

**NEW**



Specifications	
Wheel Diameter	115mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	36V (Corded equivalent 1500W)
No load speed:	3200 - 10000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.1kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>G3612DVEW2Z</b>	36V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	HSC3	4966376406494

**G3613DVF**  
36V Brushless Angle Grinder

**NEW**



Specifications	
Wheel Diameter	125mm (Ø22.23mm)
Switch Type	Paddle Switch
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	36V (Corded equivalent 1500W)
No load speed:	3200 - 10000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.1kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>G3613DVF2Z</b>	36V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	HSC3	4966376406883

**G3613DVE**  
36V Brushless Angle Grinder

**NEW**



Specifications	
Wheel Diameter	125mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	389mm
Battery voltage	36V (Corded equivalent 1500W)
No load speed:	3200 - 10,000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.1kg excl. battery

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>G3613DVEW2Z</b>	36V	Body only + low vibration handle + toolless wheel guard + cutting guard clip + wrench	HSC3	-

**G3615DVE**  
36V Brushless Angle Grinder

**NEW**



Specifications	
Wheel Diameter	150mm
Switch Type	Slide
Spindle Diameter	M14
Grip Circumference	144mm
Battery voltage	36V (Corded equivalent 1500W)
No load speed:	3200 - 8000/min
Restart Protection	YES
Soft Start	YES
Kickback Protection	YES
Anti Vibration Handle	YES
Overall length	389mm
Weight	3.2kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>G3615DVEW2Z</b>	36V	Body only + Low vibration handle + toolless wheel guard + cutting guard clip + wrench	HSC3	4966376406678



**G3623DA**  
36V MultiVolt Brushless Angle Grinder



Specifications	
Wheel Diameter	230mm
Hole Diameter	22.23mm
Spindle Thread	M14 x2
Battery voltage	36V
No load speed:	Transmission mode: 5300/min AUTO mode: 3200/min
Overall length	531mm
Weight	4.9kg with BSL36B18

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>G3623DAW4ZUK</b>	36V	Body only + Side handle + wrench	BM	4966376326570

Abrasive wheel not included

**GP18DA**  
18V Die Grinder (Slide Switch)



Specifications	
Collet Chuck	6mm
Max. Wheel	50mm
Battery voltage	18V
No load speed:	7000 - 29000/min
Overall length	464mm
Weight	2.3kg with BSL1850C battery 2.8kg with BSL36B18 battery

**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>GP18DAJ5Z</b>	18V	Body only + Collet chuck + wrenches	HSC2	4966376337422

Mounted point not included

**M3612DA**  
36V Brushless 1/2" Router



Specifications	
Collet Chuck	12.7mm (1/2") / 6.35mm (1/4")
Plunge Depth	50mm
Battery voltage	36V
No load speed:	11000 -25000/min
Height	280mm
Weight	3.8kg incl. battery + dust collector

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>M3612DAJPZ</b>	36V	1 x 2.5Ah Li-ion battery + UC18YFSL charger + accessories	HSC4	4966376335954
<b>M3612DAJ2Z</b>	36V	Body only + 2 collet chucks, template guide + dust adaptor	HSC4	4966376335930

**M1808DA**  
18V Brushless Trimmer



Specifications	
Collet Size	6.35mm (1/4")
Battery voltage	18V
No load speed:	10000-30000/min
Base mounting diameter	64.8mm
Run time per charge*	120 min with 5.0Ah battery
Height	229mm
Weight	1.7kg incl. BSL1850C

\* Trimming 4mm depth in MDF. Values shown are for reference purposes only and may vary according to materials and conditions.

**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>M1808DAJPZ</b>	18V	1 x 5.0Ah Li-ion battery + UC18YFSL charger + accessories	HSC3	4966376336135
<b>M1808DAJ2Z</b>	18V	Body only + dust adaptor + wrench	HSC3	4966376336111

**C3610DRJ**  
36V MultiVolt 254mm Table Saw



Specifications	
Blade Diameter	254mm
Cutting depth	90° - 79mm
	45° - 57mm
Braking time	3 seconds
Battery voltage	36V
No load speed:	5000 /min
Rip Fence Extension Length	Right 889 mm
	Left 445 mm
Main table size	730 x 560 mm
Weight	29.5 kg without battery

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>C3610DRJW4Z</b>	36V	254mm Table saw - Body only + push stick	X	4966376334506

Stand not included

**C3607DRA**  
36V MultiVolt 185mm Slide Compound Mitre Saw



Specifications	
Blade Diameter	185mm x 40T
Bore Ø	20mm
(HxW) Cross Cut: 0°	58 x 310mm
Mitre Cut: 45° L/R	58 x 218mm
Bevel Cut: 45° L	39 x 310mm
Bevel Cut: 45° R	16 x 310mm
Mitre Cut Angle:	Right 0-57° / Left 0-45°
Bevel Angle:	Right 0-45° / Left 0-45°
Battery voltage	36V
No load speed:	4000/min
Dimensions (w/o dust bag)	830 x 780 x 484mm
Weight	15.1kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>C3607DRAJGZ</b>	36V	2 x 5.0Ah Li-ion batteries + UC18YFSL charger	X	4966376324125

**C3610DRA**  
36V MultiVolt 254mm Slide Compound Mitre Saw



Specifications	
Blade Diameter	255mm
Bore Ø	30mm
(HxW) Cross Cut: 0°	89 x 292mm
Mitre Cut: 45° L/R	89 x 204mm
Bevel Cut: 45° L	45 x 292mm
Bevel Cut: 45° R	25 x 292mm
Mitre Cut Angle:	Right 0-60° / Left 0-55°
Bevel Angle:	Right 0-48° / Left 0-48°
Battery voltage	36V
No load speed:	4000/min
Dimensions	778 x 792 x 686mm
Weight	20.6kg with BSL36B18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>C3610DRAW4Z</b>	36V	254 mm Mitre saw - Body only	X	4966376324408



**C1806DA**  
18V 165mm Circular Saw

**NEW**



Specifications	
Blade Diameter	165mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	57mm / 38mm
Battery voltage	18V
No load speed:	0-3800/min
Overall length	291mm
Weight	3.5kg with BSL1850C

Variant	Voltage	Contents	Case	GTIN
<b>C1806DAW4Z</b>	18V	Body only + blade	X	4966376338283

**C1806DB**  
18V Brushless 165mm Circular Saw

**NEW**



**Compatible**  
**BRUSHLESS**

Specifications	
Blade Diameter	165mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	66mm / 45mm
Bevel Capacity	-5° / 45°
Battery voltage	18V
No load speed:	4500/min
Deep Cut	YES
Brake	YES
Soft Start	YES
Constant Speed Control	YES
Dimensions (LxWxH)	285 x 188 x 263mm
Weight	3.3kg with BSL1850MA

Variant	Voltage	Contents	Case	GTIN
<b>C1807DBW2Z</b>	18V	Body only + saw blade + wrench + rip fence	HSC4	4966376408252



**C1807DA**  
18V Brushless 190mm Circular Saw

**NEW**



**Compatible**  
**BRUSHLESS**

Specifications	
Blade Diameter	190mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	64.5mm / 49mm
Battery voltage	18V
No load speed:	Power Mode: 3800/min Silent Mode: 2000/min
Overall length	317mm
Weight	3.9kg with BSL1850

Variant	Voltage	Contents	Case	GTIN
<b>C1807DAW2Z</b>	18V	Body only + saw blade + wrench + rip fence	HSC4	4966376338375



### C3605DYA

36V Brushless MultiVolt 125mm Dust Collection Circular Saw



Specifications	
Blade Diameter	125mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	47mm / 30mm
Battery voltage	36V
No load speed:	Power Mode: 5000/min Silent Mode: 2600/min
Dimensions	277 x 193 x 236mm
Weight	2.8kg

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
C3605DYAJ4Z	36V	Body only + blade	HSC4	4966376328291

### C3606DPA

36V Brushless MultiVolt 165mm Plunge Saw



**NEW**


Specifications	
Blade Diameter	165mm
Bore Ø	20mm
Bevel Capacity	-1° to 46°
Max. Cut Depth 0°/45°	66mm / 43mm
Battery voltage	36V
No load speed:	2500 - 5200/min
Soft Start	YES
Overload Protection	YES
Overheat Protection	YES
Dimensions (LxWxH)	391 x 206 x 269mm
Weight	5.4kg with BSL36B18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
C3605DPAW2Z	36V	Body only + blade + dust bag + hex key	HSC4	4966376409198

Available as accessories

4100071 Guide rail GR800 - 800mm | 4100072 Guide rail GR1600 - 1600mm



### C3606DB

36V Brushless MultiVolt 165mm Circular Saw

**NEW**



Specifications	
Blade Diameter	165mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	66mm / 45mm
Bevel Capacity	-5° / 45°
Battery voltage	36V
No load speed:	5600/min
Deep Cut	YES
Brake	YES
Soft Start	YES
Constant Speed Control	YES
Dimensions (LxWxH)	285 x 188 x 265mm
Weight	3.4kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
C3606DBW2Z	36V	Body only + saw blade + wrench + rip fence	HSC4	4966376408160

Batteries not included

### C3606DUM

36V Brushless MultiVolt 165mm Circular Saw

**NEW**



Specifications	
Blade Diameter	165mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	66mm / 43mm
Bevel Capacity	-5° / 45°
Battery voltage	36V
No load speed:	- High mode: 5600/min - Medium mode: 4300/min - Silent mode: 2000/min
Guide rail compatible	YES
Dimensions (LxWxH)	314 x 198 x 263mm
Weight	4.1kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
C3606DUMW2Z	36V	Body only + saw blade + wrench + rip fence	HSC4	4966376412273

Batteries not included



**C3607DB**

36V Brushless MultiVolt 190mm Circular Saw

**NEW**



Specifications	
Blade Diameter	190mm
Bore Ø	20mm
Max. Cut Depth 90°/45°	64.5mm / 49mm
Battery voltage	36V
No load speed:	6000/min
	High Torque Mode: 4500/min
Soft Start / Soft Brake	YES
Guide rail compatible	YES
Dimensions (LxWxH)	313 x 221 x 280mm
Weight	4.3kg with BSL36A18

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>C3607DBW2Z</b>	36V	Body only + blade + guide rail adapter + wrench	HSC4	4966376412730

Batteries not included

**CD3605DB**

36V MultiVolt 150mm Metal Cutting Saw

**NEW**



Specifications	
Blade Diameter	150mm
Bore Ø	20mm
Max. Cut Depth	47mm
Battery voltage	36V
No load speed:	0 - 7000/min
Soft Start	YES
Brake	YES
Silent Mode	YES
Dimensions	227 X 236 X 176 mm
Weight	2.8kg

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>CD3605DBW2Z</b>	36V	Body only + 150mm blade for steel + wrench	HSC4	4966376409877

**CJ18DA**

18V Jigsaw



Specifications	
Max. Wood	135mm
Max. Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Battery voltage	18V
Length of Stroke	26mm
No load speed (stroke):	0-2500/min
Overall length	266mm
Weight	2.5kg

Variant	Voltage	Contents	Case	GTIN
<b>CJ18DAW4Z</b>	18V	Body only + dust collector + splinter guard + chip cover	X	4966376333622

**CJ36DA**

36V MultiVolt Top Handle Jigsaw



Specifications	
Max. Wood	160mm
Max. Mild Steel Plate	10mm
Max. Stainless Steel	3.2mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Battery voltage	36V
Length of Stroke	26mm
No load speed (stroke):	800-3500/min
Overall length	277mm
Weight	2.7kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>CJ36DAJRZ</b>	36V	2 x BSL36A18 MultiVolt batteries + UC18YSL3 charger + blade + splinter guard + chip cover + dust adaptor	HSC3	4966376331079
<b>CJ36DAJ4Z</b>	36V	Body only + blade + splinter guard + chip cover + dust adaptor	HSC3	4966376332175

**CJ18DB**

18V Barrel Grip Jigsaw

**NEW**



Specifications	
Max. Wood	135mm
Max. Mild Steel Plate	10mm
Max. Stainless Steel	2.5mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Battery voltage	18V
Length of Stroke	26mm
No load speed (stroke):	500-2500/min
Dimensions (W x L)	300 x 174mm
Weight	2.6kg

**Compatible**

Variant	Voltage	Contents	Case	GTIN
<b>CJ18DBW2Z</b>	18V	Body only + blade + splinter guard + chip cover	HSC2	4966376409600
<b>CJ18DBW4Z</b>	18V	Body only + blade + splinter guard + chip cover	X	4966376409617

**CJ36DB**

36V MultiVolt Barrel Grip Jigsaw



Specifications	
Max. Wood	160mm
Max. Mild Steel Plate	10mm
Max. Stainless Steel	3.2mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Battery voltage	36V
Length of Stroke	26mm
No load speed (stroke):	800-3500/min
Overall length	298mm
Weight	2.7kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>CJ36DBJ3Z</b>	36V	Body only + blade + splinter guard + chip cover + dust adaptor	HSC3	4966376332182

Batteries not included



# Cordless Sanding

## SV1813DA 18V 125mm Random Orbital Sander

**NEW**



Specifications	
Pad Size Diameter	125mm
Orbit Diameter	3.0mm
Variable Speed Setting	YES
Soft Start	YES
Brake	YES
Battery voltage	18V
No load speed:	7000 - 11000/min
Dimensions	158 x 158 x 153mm
Weight	1.8kg with BSL1850C

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
SV1813DAJ2Z	18V	Body only + dust bag + 2 x extraction adapter + sanding pad + 2 x sanding paper (P120)	SC	4966376402267

## SB3608DA 36V Belt Sander

**NEW**



Specifications	
Belt size	76 x 533mm
No Load Belt Speed	2.0 - 7.5m/s (122-450m/min)
Variable speed	YES
Battery voltage	36V
No load speed:	4000/min
Dimensions	323 x 150 x 199mm
Weight	4.2kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
SB3608DAW4Z	36V	Body only + dust bag + 2 x extraction adapter	X	4966376408696



## Cordless Bandsaws

### CB18DBL 18V Bandsaw



Specifications	
Max. Cut in Round Pipe	83mm
Max. Cut Square Pipe (WxH)	80 x 80mm
Blade Speed, Standard:	1.3-3.2m/s (80-195m/min)
Auto Mode (without load):	2.0m/s (120m/min)
Auto Mode (with load):	3.2m/s (195m/min)
Battery Voltage	18V
Bandsaw Blade Dimensions (L x W x T)	900 x 12.5 x 0.5mm
Dimensions (LxWxH)	413 x 173 x 266mm
Weight	3.6kg with BSL1850 battery

### BRUSHLESS

Variant	Voltage	Contents	Case	GTIN
CB18DBLJ4Z	18V	Body only + side handle + blade + wrench	x	4966376302352

### CB3612DA 36V Bandsaw

**NEW**



Specifications	
Max. Cut in Round Pipe	127mm
Max. Cut Square Pipe (WxH)	127 x 120mm
Blade Speed, Standard:	60 - 195/min
Battery Voltage	36V
Variable speed control	YES
AUTO Mode	YES
Bandsaw Blade Dimensions	1140 x 12.5 x 0.5mm
Dimensions (LxWxH)	520 x 147 x 320mm
Weight	7.5kg

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
CB3612DAW4Z	36V	Body only + saw blade + wrench	x	4966376410330

## Reciprocating Saws



### CR18DA 18V Reciprocating Saw



Specifications	
Max. Cut in Pipe	50mm
Max. Cut in Steel Plate	12mm
Max. Cut in Wood	50mm
Battery Voltage	18V
Length of Stroke	13mm
No Load speed:	0 - 3200 /min
Overall length	350mm
Weight	1.7kg

Variant	Voltage	Contents	Case	GTIN
CR18DAJ4Z	18V	Body only + blade	X	4966376334049

**CR18DMA**

18V Brushless Reciprocating Saw

**NEW**



Specifications	
Max. Cut in Pipe	130mm
Max. Cut in Wood	300mm
Battery Voltage	18V
Length of Stroke	29mm
No Load speed:	0 - 3000 /min
Variable Speed	YES
LED Light	YES
Shoe Adjustment	YES
Toolless Blade Change	YES
Dimensions (L x W x H)	246 x 207 x 87mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
CR18DAJ4Z	18V	Body only + blade for metal + hexagon wrench	HSC2	4966376408917

Batteries not included

**CR18DSL**

18V Reciprocating Saw



Specifications	
Max. Cut in Pipe	90mm
Max. Cut in Steel Plate	10mm
Max. Cut in Wood	90mm
Battery Voltage	18V
Length of Stroke	28mm
No Load speed:	0 - 2100 /min
Overall length	434mm
Weight	3.4kg with BSL1850

Variant	Voltage	Contents	Case	GTIN
CR18DSLW4Z	18V	Body only + blade + wrench	X	4966376305315

Batteries not included

**CR18DBL**

18V Brushless Reciprocating Saw



Specifications	
Max. Cut in Mild Steel Pipe	130mm
Max. Cut in PVC Pipe	130mm
Max. Cut in Wood	120mm
Max. Cut in Mild Steel Plate	19mm
Battery Voltage	18V
Length of Stroke	32mm
No Load speed:	0 - 2500 /min
Overall length	435mm
Weight	3.4kg with battery

**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
CR18DBLJ4Z	18V	Body only + blade + wrench	X	4966376304912

Batteries not included

**CR36DA**

36V Brushless Reciprocating Saw



Specifications	
Max. Cut in Pipe	130mm
Max. Cut in Mild Steel Plate	19mm
Max. Cut in Wood	300mm
Battery Voltage	36V
Length of Stroke	32mm
No Load speed:	0 - 1700 /min 0 - 2000 /min 0 - 2500 /min 0 - 3000 /min
Overall length	457mm
Weight	4.5kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
CR36DAJ4Z	36V	Body only + blade	X	4966376324842

Batteries not included

**CV18DA**  
18V Brushless Multi Tool

**NEW**



Specifications	
Blade changing action	Universal blade - 1 action Starlock / OIS - 2 action
No load speed	6000 - 20000 /min
Battery Voltage	18V
Oscillation Angle	3.6°
LED light	YES
Overall length	327mm
Weight	1.2kg excl. battery

**UVP**  
LASER VERIFIED SAFETY PROTECTION

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
CV18DAWZ	18V	Body only + pad + sanding paper + blades	HSC2	4966376412518

Batteries not included

**P18DSL**  
18V Planer



Specifications	
Max. Cutting Width	82mm
Max. Cutting Depth	2mm
Battery Voltage	18V
No Load speed:	16000 /min
Overall length	332mm
Weight	3.3kg with BSL1850

Variant	Voltage	Contents	Case	GTIN
P18DSLWPZ	18V	2 x 5.0Ah Li-ion batteries + UC18YSL3 charger + blade setting gauge + guide + wrench	HSC3	4966376316830
P18DSLW4Z	18V	Body only + blade setting gauge + guide + wrench	X	4966376317004

**AC18DA**  
18V Caulking Gun

**NEW**



Specifications	
Max. Push Force	3000 N
Dispensing Speed	Up to 14 mm/s
Variuable Speed Trigger	YES
Variable Speed Dial	YES
LED	YES
Toolless Piston Replacement	YES
Anti-drip Function	YES
Battery Voltage	18V
Dimensions (LxWxH)	482 x 280 x 82mm
Weight	2.3kg with BSL1820M

Batteries not included

Variant	Voltage	Contents	Case	GTIN
AC18DAW4Z	18V	Body only + cartridge holder 300ml + tube <b>400ml</b> + protection glasses	x	4966376403608
AC18DAW5Z	18V	Body only + cartridge holder 300ml + tube <b>600ml</b> + protection glasses	x	4966376403615



**CE18DSL**  
18V Shear



Specifications	
Max. Steel	1.6mm (16ga.)
Max. Strainless	1.2mm (18ga.)
Max. Aluminium Plate	2.3mm (13ga.)
Battery Voltage	18V
Min. Cutting Radius	25mm
No Load speed:	5300/min
Overall length	295mm with BSL1850 battery
Weight	2.2kg with BSL1850 battery

Variant	Voltage	Contents	Case	GTIN
<b>CE18DSLW4Z</b>	18V	Body only + blade set + thickness gauge	X	4966376302475

**CN18DSL**  
18V Nibbler



Specifications	
Max. Steel	1.6mm (16ga.)
Max. Strainless	1.2mm (18ga.)
Max. Aluminium Plate	2.3mm (13ga.)
Battery Voltage	18V
Min. Cutting Radius	40mm
No Load speed:	2500/min
Overall length	295mm with BSL1850 battery
Weight	2.1kg with BSL1850 battery

Variant	Voltage	Contents	Case	GTIN
<b>CN18DSLJ4Z</b>	18V	Body only + blade set + thickness gauge + wrench	X	5017658062996

**UV3628DA**  
36V Cordless Vibrator



Specifications	
Flexible Shaft Head Dia.	28mm
Available Depth	824mm
No Load Speed	12000 - 15200/min
Battery Voltage	36V
Working Time	38min (4.0Ah battery)
Overall length	1045mm
Weight	4.2kg

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>UV3628DAJYZ</b>	36V	1 x BSL361B18 battery + charger	X	4966376333004

**UM36DA**  
36V Cordless Mixer



Specifications	
Mixer Diameter	150mm
Battery Voltage	36V
Workload per charge	2.5Ah battery: 8 bags 4.0Ah battery: 13 bags
No Load speed:	High 0-1200/min Low 0-500/min
Overall length	929mm
Weight	4.4kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>UM36DAJBZ</b>	36V	1 x 2.5Ah BSL36A18 battery + charger	X	4966376333059

**VB3616DA**  
36V Rebar Bender / Cutter



Specifications	
Cutting/Bending Capacity	10mm/13mm/16mm rebar
Cuts per charge <sup>1</sup>	Approx 170 with BSL36B18
Bends per charge (90°) <sup>1</sup>	Approx 310 with BSL36B18
Cutting Time <sup>2</sup>	2.6 secs
Bending Time (180°) <sup>1</sup>	3.8 secs
Multiple Cut Capacity	10mm: 2 / 13mm: 1 / 16mm: 1
Multiple Bend Capacity	10mm: 3 / 13mm: 2 / 16mm: 1
Battery Voltage	36V
Dimensions	510 x 230 x 241mm
Weight	18.9kg with BSL36A18

**MV** Compatible  
**BRUSHLESS**

<sup>1</sup> 13mm diameter SD345 rebar  
<sup>2</sup> 16mm diameter SD390 rebar

Variant	Voltage	Contents	Case	GTIN
<b>VB3616DAJGZ</b>	36V	2 x BSL36B18 batteries + charger	BM	4966376331796

**R18DSL**  
18V Cordless Wet/Dry Vac



Specifications	
Dust Box Capacity	670ml
Battery Voltage	18V
Overall length	430mm
Weight	1.5kg
Continuous Operating Time 3.0Ah	29 mins

Variant	Voltage	Contents	Case	GTIN
<b>R18DSLW4Z</b>	18V	Body only + brush nozzle + crevice nozzle	X	4966376317349



**R18DB**  
18V Cordless Cleaner



Specifications	
Dust Box Capacity	560ml
Suction Work Rate	High 40W, Mid 30W, Low 16W
Battery Voltage	18V
Overall length	476mm
	1003mm with extension pipe
Weight	1.7kg with BSL36A18
Continuous Operating Time	
3 (High)	Approx. 40 mins
2 (Medium)	Approx. 48 mins
1 (Low)	Approx. 60 mins
When using BSL36A18 MultiVolt battery pack	

Variant	Voltage	Contents	Case	GTIN
<b>R18DBW4Z</b>	18V	Body only + extension pipe + floor nozzle	X	4966376335213

### R36DB

36V MultiVolt Cordless Cleaner



Continuous Operating Times  
 3 (High) Approx. 15 mins  
 2 (Medium) Approx. 30 mins  
 1 (Low) Approx. 60 mins  
 When using BSL36A18 MultiVolt battery pack

Specifications  
 Dust Box Capacity 560ml  
 Suction Work Rate High 155W, Mid 65W, Low 35W  
 Battery Voltage 36V  
 Overall length 476mm  
 1008mm with extension pipe  
 Weight 1.9kg with BSL36A18

**AV** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
R36DBW4Z	36V	Body only + extension pipe + floor nozzle	X	4966376409129

### RB18DC


18V Blower



Specifications  
 Air Volume Flow 0 - 3.5m³/min (without nozzle)  
 Max. Air Velocity 95m/s (with nozzle)  
 Average Air Velocity 78m/s (with nozzle)  
 Battery Voltage 18V  
 Overall length 490mm with BSL36A18 battery  
 Weight 1.8kg with BSL36A18 battery

**AV** Compatible

Variant	Voltage	Contents	Case	GTIN
RB18DCW4Z	18V	Body only	X	4966376338689

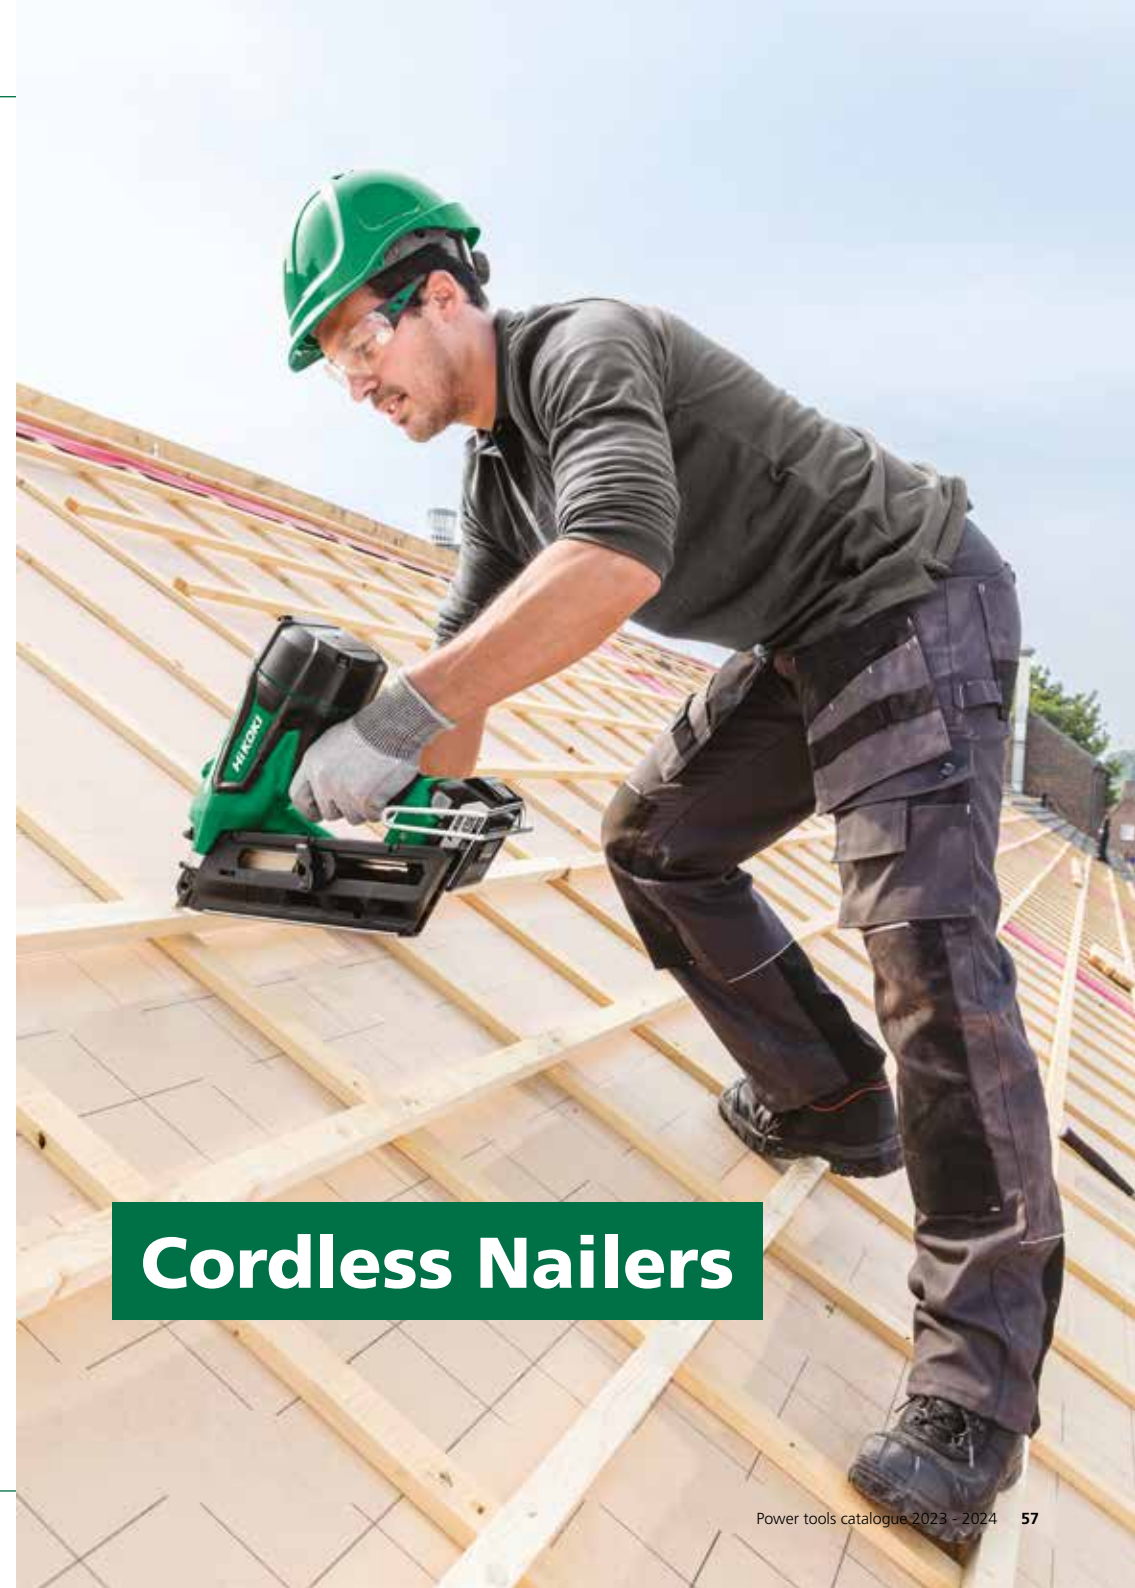

**Cordless Nailers**



**N18DSL**  
18V 23 Gauge Stapler



Specifications	
Staple Size	0.7 x 0.5mm
Staple Length	6-13mm
Staple Width	12mm
Battery Voltage	18V
Driving Method	Mechanical Spring
Corner Nailing Performance	3.0mm
Overall length	235mm
Weight	1.7kg excl. battery

Variant	Voltage	Contents	Case	GTIN
<b>N18DSLW4Z</b>	18V	Body only	X	4966376336340

Batteries not included

**NP18DSAL**  
18V 23 Gauge Pin Nailer



Specifications	
Pin Size	23 gauge
Nail Length	15-35mm
Battery Voltage	18V
Driving Method	Mechanical Spring
Corner Nailing Performance	3.0mm
Overall length	262mm
Weight	2.2kg excl. battery

Variant	Voltage	Contents	Case	GTIN
<b>NP18DSALW4Z</b>	18V	Body only	X	4966376336357

**NR1890DC**  
18V Cordless 1st Fix Framing Nailer



Specifications	
Driving System	Air Spring
Nail Length	50mm to 90mm
Nail Diameter	2.9mm - 3.3mm
Driving Speed	1.5 to 2 nails/sec. (Intermittent)
Battery Voltage	18V
Loading Capacity	47 nails
Firing Mode	Full Sequential / Contact
Dimensions (H x L x W)	342 x 309 x 127mm
Weight	4.8kg with BSL1850 battery

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>NR1890DCJPZ</b>	18V	2 x 5.0Ah Li-ion batteries + charger + safety glasses	SC	49663763277829
<b>NR1890DCJ4Z</b>	18V	Body only + safety glasses	SC	49663763277812

**NR3675DD**  
36V Cordless Duplex Nailer

**NEW**



Specifications	
Driving System	Air Spring
Nail Shank Diameter	3.3mm
Nail Length	89/77mm
Driving Speed	2 nails/sec. (Intermittent)
Battery Voltage	36V
Loading Capacity	35 nails
Selectable Firing Modes	Full Sequential / Bump Fire
Dimensions (H x L x W)	342 x 352 x 137mm
Weight	4.9kg

**NEW** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>NR3675DDW6Z</b>	36V	Body only + safety glasses	HSC4	4966376409549

### NT1865DMA

18V Brushless 15GA Angled Finish Nailer



Specifications	
Driving System	Air Spring
Nail Length	32mm to 65mm
Driving Speed	3 nails/sec. (Intermittent)
Battery Voltage	18V
Loading Capacity	100 nails (1 strip)
Firing Mode	Full Sequential / Contact
Dimensions (H x L x W)	344 x 300 x 104mm
Weight	3.5kg with BSL1830C battery

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
NT1865DMAJYZ	18V	2 x 2.0Ah Li-ion batteries + charger + nose cap + safety glasses	HSC4	4966376411450
NT1865DMAJ4Z	18V	Body only + nose cap + safety glasses	HSC4	4966376327928

### NT1865DM

18V Brushless 16GA Straight Finish Nailer



Specifications	
Driving System	Air Spring
Nail Length	25mm to 65mm
Driving Speed	3 nails/sec. (Intermittent)
Battery Voltage	18V
Loading Capacity	100 nails (2 strips)
Firing Mode	Full Sequential / Contact
Dimensions (H x L x W)	315 x 298 x 104mm
Weight	3.4kg with BSL1830C

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
NT1865DMJXZ	18V	2 x 3.0Ah Li-ion batteries + charger + safety glasses	HSC4	4966376327904

### NT1865DMB

18V Brushless 16GA Angled Finish Nailer

**NEW**



Specifications	
Driving System	Air Spring
Nail Gauge	16 Gauge
Nail Length	32-65mm
Driving Speed	3 nails/sec. (Intermittent)
Battery Voltage	18V
Loading Capacity	100 nails
Selectable Firing Modes	Full Sequential / Contact
Dimensions (H x L x W)	315 x 298 x 108mm
Weight	3.4kg with BSL1830C

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
NT1865DMBJXZ	18V	2 x 3.0Ah Li-ion batteries + charger + nose cap + safety glasses	HSC4	4966376336357



**NT1850DF**  
18V Cordless Compact 18 Gauge Brad Nailer

**NEW**



Specifications	
Driving System	Air Spring
Magazine Angle	0°
Applicable Nail Shank Ø	1 - 1.25mm / 18 Gauge
Applicable Nail Length	16mm to 50mm
Nail Loading Capacity	100 nails
Battery Voltage	18V
Cycle Rate	2 nails/sec
Firing Modes	Full Sequential / Contact
Toolless Depth Control	YES
Weight	2.4kg with BSL1820M

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>NT1850DFJXZ</b>	18V	2 x battery BSL1820M, charger UC18YFSL + nose cap	HSC4	4966376335442

**UR18DA**  
18V DAB/DAB+ Bluetooth Cordless Radio

**NEW**



Specifications	
Voltage	18V
DAB+	YES
F Frequency AM	530 - 1620 kHz
Frequency FM	87.5 - 108 MHz
Bluetooth	YES
Equaliser	YES
AC Adapter	YES
Station Presets	YES
Dimensions (LxWxH)	240 x 176 x 185 mm
Weight	2.45kg with BSL1850MA

Variant	Voltage	Contents	Case	GTIN
<b>UR18DAJ4Z</b>	18V	Body only + AC power adapter	X	4966376407491

**NH18DSDL**  
18V Cordless Auto Hammer



Specifications	
Battery Voltage	18V/MultiVolt
Number of blows	4000 /min
Applicable Nail	
Length	25 - 90mm *1
Head Diameter	Ø4.0 - 8.7mm *1
Dimensions (LxWxH)	285 x 135 x 93mm
Weight	1.3kg with BSL1820M

\*1: Opposing wood: SPF, cedar. May not be able to fully hammer nail into materials such as hemlock, MDF or laminated lumber.

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>NH18DSLW4Z</b>	18V	Body only + Eye protection glasses	X	4966376264391

**UR18DSDL**  
18V DAB/DAB+ Bluetooth Site Radio



Specifications	
Frequency band DAB/DAB+	174.928 to 239.200 MHz Band III
FM	87.5 to 108 MHz
AM	522 to 1629 KHz
Input terminal	AUX-IN (3.5mm)
Output terminal	USB charging jack (5V 1A)
Power supply Slide battery	DC 14.4V / 18V
Household power supply	Using provided AC adapter
Back up batteries	DC 3.0V, two AA batteries
Dimensions (LxWxH)	405 x 312 x 265mm (with antenna retracted)
Weight	4.0kg excl. battery

Variant	Voltage	Contents	Case	GTIN
<b>UR18DSDLJ0Z</b>	18V	Body only + mains power adapter	X	4966376319626



**UB18DA**  
18V Cordless Search Light



Specifications	
Battery Voltage	14.4V/18V/MultiVolt
Max. Output	2500 lumens
Lighting mode:	
Spot + wide	2500 lumens
Spot	1100 lumens
Wide	1300 lumens
Continuous runtime* *using BSL1860	
Spot + wide	3.0 hours
Spot	6.0 hours
Wide	5.8 hours
Wide (Eco)	22.0 hours
Dimensions (LxWxH)	203 x 280 x 204mm
Weight	1.85kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UB18DAW4Z	18V	Body only	X	4966376328734

**UB18DB**  
18V Cordless Construction Light

**NEW**



Specifications	
Light Source	LED White
Battery Voltage	18V
Brightness Min/Max power	350 / 2000 Lumen
Light Colour	5000 K (daylight white)
Adjustable angle	360°
Run Time 5.0Ah battery:	
Min. power	32 hours
Max. power	6.5 hours
IP Certification	
IP54	
Impact Resistant	YES (IK08)
Battery display level	YES
Dimensions (L x W x h)	202 x 140 x 162mm
Weight	1.4kg excl. battery

Compatible

Variant	Voltage	Contents	Case	GTIN
UB18DBW4Z	18V	Body only	X	4966376402069

**UB18DC**  
18V Cordless Work Light

**NEW**



Continuous Runtime per Charge *		
18V Battery	Min. Brightness 700lm	Max. Brightness 4000lm
3.0Ah	Approx. 12h	Approx. 1.5h
5.0Ah	Approx. 20h	Approx. 3.0h
8.0Ah	Approx. 30h	Approx. 4.5h

\* Runtime per charge may vary according to types of battery and operating conditions

Specifications	
Battery Voltage	18V
LED (White)	60 pcs
USB Port	5V, 1A
Brightness Adjustment Range	700 - 4000 lm
Dust and water resistant	IP65
Remaining battery indicator	YES
Dimensions (LxWxH)	186 x 155 x 276mm
Weight	1.9kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UB18DCW4Z	18V	Body only	X	4966376402120

**UB18DD**  
18V Cordless Construction Light

**NEW**



**NEW** Compatible

Specifications	
Light Source	LED
Battery Voltage	18V
Brightness Min/Max power	1000 / 10000 Lumen
Light Colour	4500 K (natural white)
Adjustable angle	144°
Run Time 5.0Ah battery:	Min. power 10 hours Max. power 1.5 hours
USB power output	5V / 1.0A
IP Certification	IP65
Impact Resistant	YES (IK08)
Battery display level	YES
Dimensions (L x W x h)	323 x 314 x 150mm
Weight	4.1kg excl. battery

Variant	Voltage	Contents	Case	GTIN
<b>UB18DDJ4Z</b>	18V	Body only	X	4966376402151

**UB18DF**  
18V Cordless Work Light



Specifications	
Globe	LED White
Battery Voltage	18V
Brightness Mode	2 modes High & Low
Brightness Adjustment Range	Low: 320lm, High: 750lm
Lighting Range	360°
Run Time:	12H High Mode 29H Low Mode
Weight	0.4kg excl. battery

Variant	Voltage	Contents	Case	GTIN
<b>UB18DFW4Z</b>	18V	Body only	X	4966376408764

**UB18DE**  
18V Cordless Swivel Head Torch



Specifications	
LED	4.7W x 1pc.
Battery Voltage	18V
Working Time	38min (4.0Ah battery)
High Mode	250 lm
Low Mode	120 lm
Run Time:	28H High Mode (BSL1850) 63H Low Mode (BSL1850)
Dimensions (LxWxH)	92 x 79 x 250mm excl. battery
Weight	0.3kg excl. battery

Variant	Voltage	Contents	Case	GTIN
<b>UB18DEW4Z</b>	18V	Body only	X	4966376408733

**UB18DG**  
18V Cordless Tripod Light

**NEW**



**NEW** Compatible

Specifications	
Light Source	LED
Battery Voltage	18V
Brightness Min/Max power	1000 / 4000 Lumen
Light Colour	5000 K (daylight white)
Adjustable angle	360°
Run Time 5.0Ah battery:	Min. power 10.5 hours Max. power 2.5 hours
IP Certification	IP55
AC Adapter	YES
Dimensions (LxWxh) Extended	630 x 720 x 2150 mm
Dimensions (LxWxh) Retracted	222 x 210 x 1035 mm
Weight	8.8kg with BSL1850MA

Variant	Voltage	Contents	Case	GTIN
<b>UB18DGJ4Z</b>	18V	Body only + AC Adapter	X	4966376410255

**UB18DGL**  
18V Cordless work light



Specifications	
Brightness / Measured Distance: High Mode	250lx/1m
Brightness / Measured Distance: Low Mode	140lx/1m
LED Lamp	LED 18W (0.5W x 36pcs.)
Battery Voltage	14.4V and 18V
Dimensions (LxWxH)	198 x 256 x 252mm
Run Time - BSL1840M	
High Mode	Approx. 5 Hours
Low Mode	Approx. 11.5 Hours
Weight	0.74kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UB18DGLL0Z	18V	Body only	X	4966376317707

**UB18DJL**  
18V Cordless LED torch



Compatible

Specifications	
Battery Voltage	14.4V/18V/MultiVolt
Torchlight Brightness/ measured distance	6000lx/1m
Torchlight LED lamp	1 x LED 3W
Worklight Brightness/ measured distance	High: 110lx/1m, Medium: 55lx/1m, Low: 27lx/1m
Worklight LED lamp	12 x LED 0.5W
Dimensions (LxWxH)	205 x 78 x 108mm excl. battery
Run Time - BSL1850	
High Mode	Approx. 16 Hours
Medium Mode	Approx. 30 Hours
Low Mode	Approx. 51 Hours
Weight	0.3kg excl. battery

Variant	Voltage	Contents	Case	GTIN
UB18DJLL0Z	18V	Body only + Strap + Hook	X	4966376317745

**UB18DH**  
18V Cordless Searchlight

**NEW**



Specifications	
Light Source	LED
Battery Voltage	18V
Brightness Spot mode:	Low 400 Lumens Medium 750 Lumens High 950 Lumens
Brightness Wide mode:	Low 450 Lumens Medium 800 Lumens High 1050 Lumens
Irridation distance	670 m
IP Certification	IP55
Strobe mode	YES
Dimensions (LxWxh) Retracted	174 x 101 x 268 mm
Weight	1.5kg with BSL1850MA

Compatible

Variant	Voltage	Contents	Case	GTIN
UB18DHW4Z	18V	Body only + belt hook	X	4966376410705

**Notes**



### UC18YFSLJEZ

18V Starter pack 2 - 2 x BSL1840M & UC18YFSL



**Battery Specifications**

Voltage	18V
Capacity	4.0Ah
Energy (voltage x capacity)	72 Wh
Battery Level Indicator	YES
Charging time with UCYFSL	60min
Number of cells	5 (1Layer)
Dimensions	134 x 83 x 54mm
Weight	560g

Charger UC18YFSL  
18V - max. 3.5A

Variant	Voltage	Contents	Case	GTIN
UC18YFSLJEZ	18V	2 x BSL1840M 4.0Ah batteries + UC18YFSL charger	X	4966376409723

### UC18YSL3JEZ

MultiVolt Starter pack 1 - 2 x BSL36A18 & UC18YSL3



**Battery Specifications**

Voltage Capacity	36V - 2.5Ah / 18V - 5.0Ah
Battery Level Indicator	4 Stage
Cooling System	Yes
Charging Time	Approx. 32mins (when using UC18 YSL3)
Compatible Products 18V	All existing 18V Slide type
Compatible Products 36V	MultiVolt 36V tools
Dimensions (LxWxH)	116 x 69 x 76mm
Weight	700g

Fast Charger UC18YSL3  
18V/36V - max. 8A  
1 x USB charging port (2 A)

Variant	Voltage	Contents	Case	GTIN
UC18YSL3JEZ	18V/36V	2 x BSL36A18 MV batteries + UC18YSL3 Fast charger	X	4966376328611

### UC18YFSLJFZ

18V Starter pack 1 - 2 x BSL1820M & UC18YFSL



**Battery Specifications**

Voltage	18V
Capacity	2.0Ah
Energy (voltage x capacity)	36 Wh
Battery Level Indicator	YES
Charging time with UCYFSL	35min
Number of cells	5 (1Layer)
Dimensions	116 x 76 x 49mm
Weight	380g

Charger UC18YFSL  
18V - max. 3.5A

Variant	Voltage	Contents	Case	GTIN
UC18YFSLJFZ	18V	2 x BSL1820M 2.0Ah batteries + UC18YFSL charger	X	4966376409754

### UC18YSL3JFZ

MultiVolt Starter pack 2 - 2 x BSL36B18 & UC18YSL3



**Battery Specifications**

Voltage Capacity	36V - 4.0Ah / 18V - 8.0Ah
Battery Level Indicator	4 Stage
Cooling System	Yes
Charging Time	Approx. 52mins (when using UC18 YSL3)
Compatible Products 18V	All existing 18V Slide type
Compatible Products 36V	MultiVolt 36V tools
Dimensions (LxWxH)	134 x 75 x 83mm
Weight	950g

Fast Charger UC18YSL3  
18V/36V - max. 8A  
1 x USB charging port (2 A)

Variant	Voltage	Contents	Case	GTIN
UC18YSL3JFZ	18V/36V	2 x BSL36B18 MV batteries + UC18YSL3 Fast charger	X	4966376332199

### UC18YSL3JGZ

18V Starter pack 3 - 2 x BSL1850 & UC18YSL3



Battery Specifications

Voltage	18V
Capacity	5.0Ah
Energy (voltage x capacity)	90 Wh
Battery Level Indicator	NO
Dimensions	115 80 x 70mm
Weight	1kg

Fast Charger UC18YSL3  
18V/36V - max. 8A  
1 x USB charging port (2 A)

Variant	Voltage	Contents	Case	GTIN
UC18YSL3JGZ	18V/36V	2 x BSL1850 5.0Ah batteries + UC18YSL3 Fast charger	X	4966376409693

### BSL1850

18V Battery



Battery Specifications

Voltage	18V
Capacity	5.0Ah
Energy (voltage x capacity)	90 Wh
Battery Level Indicator	NO
Charging time with UC18YSL3	32min
Dimensions	115 80 x 70mm
Weight	1kg

Variant	Voltage	Contents	Case	GTIN
335790	18V	BSL1850 battery only	X	4549115038844

### UC18YTSL

4 Port Charger



Specifications

Charge time per battery (Rapid charge)	
6.0Ah	38 mins
5.0Ah	32 mins
3.0Ah	20 mins
Charge time per Set of 4 batteries (Simultaneous charge)	
6.0Ah	152 mins
5.0Ah	128 mins
3.0Ah	80 mins
USB Output	2 sockets, 2A total
AC Output	8A
Operating temperature	-10 °C to 50 °C

Variant	Voltage	Contents	Case	GTIN
UC18YTSJ0Z	18V/36V	Charger only	X	4966376330904

### BSL36A18

MultiVolt Li-ion battery 2.5Ah/5.0Ah



Battery Specifications

Voltage Capacity	36V - 2.5Ah / 18V - 5.0Ah
Battery Level Indicator	4 Stage
Cooling System	Yes
Charging Time	Approx. 32mins (when using UC18 YSL3)
Compatible Products 18V	All existing 18V Slide type
Compatible Products 36V	MultiVolt 36V tools
Dimensions (LxWxH)	116 x 69 x 76mm
Weight	700g
Compatible Chargers	All chargers for 14.4V - 36V Slide-type Lithium-ion batteries

Variant	Voltage	Contents	Case	GTIN
371750	18V/36V	BSL36A18 battery only	X	454911515156203

**BSL36B18**  
MultiVolt Li-ion battery 4.0Ah/8.0Ah



Battery Specifications	
Voltage Capacity	36V - 4.0Ah / 18V - 8.0Ah
Battery Level Indicator	4 Stage
Cooling System	Yes
Charging Time	Approx. 52mins (when using UC18 YSL3)
Compatible Products 18V	All existing 18V Slide type
Compatible Products 36V	MultiVolt 36V tools
Dimensions (LxWxH)	134 x 75 x 83mm
Weight	950g
Compatible Chargers	All chargers for 14.4V - 36V Slide-type Lithium -ion batteries

Variant	Voltage	Contents	Case	GTIN
372120	18V/36V	BSL36B18 battery only	X	4549115160651

**BSL1820M**  
18V Battery 2.0Ah Li-ion

**NEW**



Battery Specifications	
Voltage	18V
Capacity	2.0Ah
Energy (voltage x capacity)	36 Wh
Battery Level Indicator	YES
Charging time with UC18 YSL3	Approx. 15min
Number of cells	5 (1Layer)
Dimensions	116 x 76 x 49mm
Weight	380g

Variant	Voltage	Contents	Case	GTIN
377796	18V	BSL1820M battery only	X	4549115251496

**BSL1850C**  
18V 5.0Ah Li-ion Compact battery



Battery Specifications	
Voltage	18V
Capacity	5.0Ah
Energy (voltage x capacity)	90 Wh
Battery Level Indicator	NO
Charging time with UC18 YSL3	32min
Number of cells	5 (1Layer)
Dimensions	97 x 76 x 71mm
Weight	550g

Variant	Voltage	Contents	Case	GTIN
376029	18V	BSL1850C battery only	X	4549115223684

**BSL1840M**  
18V Battery 4.0Ah Li-ion

**NEW**



Battery Specifications	
Voltage	18V
Capacity	4.0Ah
Energy (voltage x capacity)	72 Wh
Battery Level Indicator	YES
Charging time with UC18 YSL3	Approx. 28min
Number of cells	5 (1Layer)
Dimensions	134 x 83 x 54mm
Weight	560g

Variant	Voltage	Contents	Case	GTIN
378679	18V	BSL1840M battery only	X	454911515156203



**BSL1850MA**  
18V Battery 5.0Ah Li-ion

**NEW**



Battery Specifications	
Voltage	18V
Capacity	5.0Ah
Energy (voltage x capacity)	90 Wh
Battery Level Indicator	YES
Charging time with UC18 YSL3	Approx. 32min
Number of cells	10 (2 layers)
Dimensions	116 x 76 x 69mm
Weight	650g

Variant	Voltage	Contents	Case	GTIN
<b>378683</b>	18V	BSL1850MA battery only	X	4549115264441

**ET36A**  
36V MultiVolt Mains power adapter



Specifications	
Compatible tool range	MultiVolt series
Input Supply	230V
Output Voltage	36V
Peak Output Voltage	2kW
Cord Length	6.0m
Dimensions:	
Adapter	83 x 134 x 75mm
PFC Box	100 x 185 x 78mm
Weight:	
Adapter	0.8kg
PFC Box	1.2kg

Variant	Voltage	Contents	Case	GTIN
<b>ET36AJ0Z</b>	36V	Mains adapter only	X	4966376324521

**RA18DA**  
18V Cordless Air Duster

**NEW**



Specifications	
Voltage	18V
Max. Air Volume	0.7 m³/min
Air Velocity	122 m/sec
Type of Switch	Variable speed trigger
On-lock function	YES
LED	YES
Dimensions (LxWxH)	224 x 250 x 94mm
Weight	1.1kg excl. battery



Batteries not included

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>RA18DAW4Z</b>	18V	Body only + Belt hook + Nozzle set	X	4966376412174

### HSC1/2/3/4

#### Stackable Case System

- Fully stackable and interlocking system
- Cases can be stacked in any order or configuration
- Optional wheeled trolley platform
- Optional insert boxes for HSC 1, perfect for screws, nuts, bolts and other small loose items
- Optional moulded trays to fit a wide variety of HIKOKI mains and cordless tools



Castor Assembly



HSC1 - 295 x 395 x 101mm



HSC2 - 295 x 395 x 158mm



HSC3 - 295 x 395 x 210mm



HSC4 - 295 x 395 x 315mm

Part No	Description	Suitable for	Fits
402544	HSC1 - empty case with upper foam lining	General use	
402545	HSC2 - empty case with upper foam lining	General use	
402546	HSC3 - empty case with upper foam lining	General use	
402547	HSC4 - empty case with upper foam lining	General use	
402538	HSC1 - with 3 boxes	Storage of small items	
402539	HSC2 - empty case with upper & lower foam lining	General use	
402540	HSC3 - empty case with upper & lower foam lining	General use	
402541	HSC4 - empty case with upper & lower foam lining	General use	
402543	Castor Tray	Transport	HSC1/2/3/4
402542	Organiser tray with 3 partitions	Storage of small items	HSC1
337746	Inner Tray	General use	HSC1
336475	Plastic tray for 14.4/18V drill driver/combi/impact	All DS/DV/WH/WR series	HSC2
339776	Plastic tray for MultiVolt drill driver/combi drill	DS36DAX/DV36DAX	HSC2
336644	Plastic tray for 10.8V drill driver/impact driver	10.8V tools	HSC1
337740	Plastic tray for jigsaw	CJ110MV	HSC1
337741	Plastic tray for 2kg hammer drill	2kg hammers	HSC1
337764	Plastic tray for plam sander	SV13YA	HSC2
337114	Plastic tray for cordless hammer drill	DH18DSL	HSC2
337110	Plastic tray for cordless jigsaw, botom for battery & charger	CJ18DSL	HSC3
337111	Plastic tray for jigsaw, upper for machine	CJ18DSL	HSC3
337112	Plastic tray for cordless screwdriver	WF18DSL	HSC3
337937	Plastic tray for multi tool	CV18DBL/CV350V	HSC2
337288	Plastic tray for cordless angle drill	DN18DSL	HSC2
337113	Plastic tray for cordless grinder	G18DSL	HSC3
338872	Plastic tray for brushless grinder	G18DBAL	HSC3
370370	Plastic tray for MultiVolt grinder	G3612DA/G3613DB	HSC3
339368	Plastic tray for 2 pce drill/impact driver kit	Most 18V drills & impact drivers	HSC3
373646	Plastic tray for 185mm MultiVolt circular saw	C3607DA	HSC4
337742	Sponge tray for planer	P205F/P18DSL	HSC3
337109	Sponge tray for cordless high torque impact wrench	WR18DSSL	HSC3
337658	Sponge tray for circular saw	C7UY only	HSC4
337659	Sponge tray for circular saw	C6BU2/C7U2/C7BU2	HSC4
337529	Sponge tray for cordless circular saw	C18DSL	HSC4
373135	Sponge tray for MultiVolt SDS hammer drill	DH36DPA	HSC4
373138	Sponge tray for 165mm MultiVolt circular saw	C3606DA	HSC4
373223	Sponge tray for MultiVolt impact wrench	WR36DA/WR36DB	HSC3
337763	Sponge tray for router	M8V2	HSC2
370331	Sponge tray for brushless hammer drill / framing nailer	DH18DBL/NR1890DBCL	HSC4
371895	Sponge tray for finish nailer	NT1850DBSL/NT1865DBSL/ NT1865DBAL	HSC4
336472	Latch (C217817)	Spare	HSC1/2/3/4
336473	Handle (C112759)	Spare	HSC1/2/3/4
336474	Hinge (C345573)	Spare	HSC1/2/3/4

The HSC case range are covered by the standard 12 month warranty only

### CS3630DB

36V MultiVolt Top Handle Chainsaw \*\* ARBORISTS ONLY \*\*



Specifications	
Battery Voltage	36V
Guide Bar Length	310mm (1/2")
Chain Speed	8.3m/s
Type of Guide Bar	P012-50CR
Chain Pitch	9.5mm (3/8")
Overall length	599mm
Weight	4.3kg with BSL36A18 battery

**AV** Compatible  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>CS3630DBW4Z</b>	36V	1 x BSL38A18 battery + UC18YSL3 charger + chain cover + chain oil + wrench	X	4966376335770

### CH3656DA

36V MultiVolt Hedge Trimmer



Specifications	
Battery Voltage	36V
Blade Length	620mm
Blade Length (Effective)	560mm
Blade Pitch	35mm
Overall Length	1088mm
Weight	4.1kg with BSL36A18

**AV** Compatible

Variant	Voltage	Contents	Case	GTIN
<b>CH3656DAJ4Z</b>	36V	Body only + Blade cover	X	4966376303458


Batteries not included

### CG36DB

36V MultiVolt Cordless Grass Trimmers

(Bike handle)

**CG36DBW5Z**

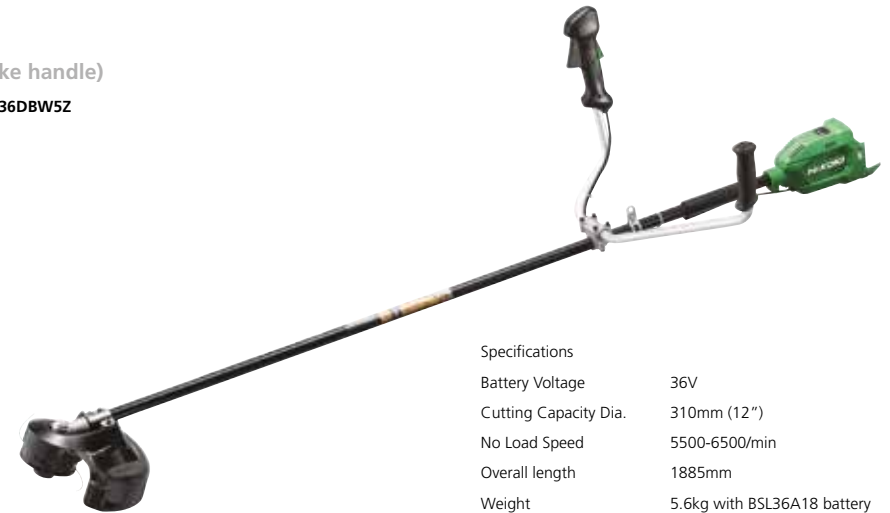

Specifications	
Battery Voltage	36V
Cutting Capacity Dia.	310mm (12")
No Load Speed	5500-6500/min
Overall length	1885mm
Weight	5.6kg with BSL36A18 battery

(Loop handle)

**CG36DBW4Z**



Specifications	
Battery Voltage	36V
Cutting Capacity Dia.	310mm (12")
No Load Speed	5500-6500/min
Overall length	1885mm
Weight	5.8kg with BSL36A18 battery

**AV** Compatible

Variant	Voltage	Contents	Case	GTIN
<b>CG36DBW5Z</b>	36V	Body only + Harness + Safety Glasses + Wrenches	X	4966376336302
<b>CG36DBW4Z</b>	36V	Body only + Harness + Safety Glasses + Wrenches	X	4966376336296



**RB36DA**  
36V MultiVolt Blower



Specifications	
Battery Voltage	36V
Air Volume	680m³/h (800m³/h in turbo mode)
Air Velocity	45m/s (53m/s in turbo mode)
Blade Pitch	35mm
Overall Length	940mm
Weight	3.5kg with BSL36A18

**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>RB36DAJ4Z</b>	36V	Body only + Nozzle	X	4966376317486

Batteries not included

**KC18DCJAZ**  
18V Twin Pack - DV18DC & WH18DC



Kit includes  
DV18DCX      Combi Drill  
WH18DC      Impact Driver

Variant	Voltage	Contents	Case	GTIN
<b>KC18DCJAZ</b>	18V	DV18DCX / WH18DC, 2 x BSL36A18 MV batteries, UC18YSL3 charger	HSC3	4966376406227

**KC18DCJ CZ**  
18V Twin Pack - DV18DC & WR18DH



Kit includes  
DV18DC      Comb Drill  
WR18DH      Impact Wrench

Variant	Voltage	Contents	Case	GTIN
<b>KC18DCJ CZ</b>	18V	DV18DCX / WR18DH, 2 x BSL36A18 MV batteries, UC18YSL3 charger	HSC3	4966376413652

**KC18DEJAZ**

18V Twin Pack - DV18DE / WH18DE



Kit includes

DV18DE

WH18DE

Combi Drill

Impact Driver



**Compatible**  
**BRUSHLESS**

Variant	Voltage	Contents	Case	GTIN
<b>KC18DEJAZ</b>	18V	DV18DE & WH18DE + 2 x BSL36A18 batteries + UC18YFL charger	HSC3	4966376406111

**KC18DFXJAZ**

18V MultiVolt Twin Pack - DV18DFX / WH18DFX



Kit includes

DV18DFX

WH18DFX

Combi Drill

Impact Driver



Variant	Voltage	Contents	Case	GTIN
<b>KC18DFXJAZ</b>	18V	DV18DF & WH18DF + 2 x BSL36A18 batteries + UC18YKSL charger	PC	4966376402410

**Notes**

**RH18DA**  
18V Cordless Heat Gun

**NEW**



Specifications

Voltage	18V
Air Volume	Step 1: 200 l/min Step 2: 300 l/min
Blowing Temperature	Step 1: 30 - 400 °C Step 2: 30 - 550 °C 10 C steps
Switch On-lock function	YES
LCD panel	YES
Quick nozzle change	YES
Hanging hook	YES
LED	YES
Dimensions (LxWxH)	165 x 78 x 217mm
Weight	1.6kg with BSL36B18

**AV** Compatible

Variant	Voltage	Contents	Case	GTIN
<b>RH18DAW4Z</b>	18V	Body only + round nozzle + reflector nozzle + wide slot nozzle	X	4966376403288

# Mains powered tools



**D6SH**  
6MM Rotary Drill



Specifications	
Chuck capacity	0.5 - 6.5mm
Max. Steel	6.5mm
Max. Wood	9mm
Power Input	240W
No Load Speed	4500/min
Overall length	206mm
Weight	0.9kg



Variant	Voltage	Contents	Case	GTIN
<b>D6SHJ1Z</b>	230V	D6SH + Depth stop + chuck key	X	4966376271436
<b>D6SHJ2Z</b>	110V	D6SH + Depth stop + chuck key	X	4966376271443

**D10VF**  
10mm Rotary Drill



Specifications	
Chuck capacity	0.8 - 10mm
Max. Steel (Twist bit)	10mm
Max. Wood (Flat bit)	25mm
Holesaw	29mm
Power Input	710W
No Load Speed	0 - 3000/min
Overall length	265mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
<b>D10VFJ6Z</b>	230V	D10VF (Tool only)	BM	4966376270125
<b>D10VFJ7Z</b>	110V	D10VF (Tool only)	BM	4966376270132

**D10VC3**  
10mm Rotary Drill



Specifications	
Chuck capacity	10mm
Max. Steel (Twist bit)	10mm
Max. Wood (Flat bit)	32mm
Power Input	600W
No Load Speed	0 - 2500/min
Overall length	242mm
Weight	1.4kg



Variant	Voltage	Contents	Case	GTIN
<b>D10VC3J6Z</b>	230V	D10VC3 (Tool only)	X	4966376270064
<b>D10VC3J7Z</b>	110V	D10VC3 (Tool only)	X	4966376270071

**D13VF**  
13mm Rotary Drill



Specifications	
Chuck capacity	1.5 - 13mm
Max. Steel (Twist bit)	13mm
Max. Wood (Flat bit)	50mm
Auger bit (wood)	32mm
Holesaw	102mm
Power Input	710W
No Load Speed	0 - 850/min
Overall length	290mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
<b>D13VFJ6Z</b>	230V	D13VF + Side handle	BM	4966376270873
<b>D13VFJ7Z</b>	110V	D13VF + Side handle	BM	4966376270880

**D13**  
13mm Rotary Drill



Specifications	
Chuck capacity	1.5 - 13mm
Max. Steel	13mm
Max. Wood	40mm
Power Input	720W
No Load Speed	550/min
Overall length	378mm
Weight	3.0kg



Variant	Voltage	Contents	Case	GTIN
<b>D13J1Z</b>	230V	D13 + side handle + chuck key	X	4966376270699
<b>D13J2Z</b>	110V	D13 + side handle + chuck key	X	4966376270705

**DV16V**  
16mm Impact Drill



Specifications	
Chuck capacity	1.5 - 13mm
Max. Concrete	16mm
Max. Steel	13mm
Power Input	590W
No Load Speed	0 - 2900/min
Full Load Impact Rate	34500/min
Overall length	269mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
<b>DV16VJ6Z</b>	230V	DV16V + side handle + depth stop	BM	4966376286317
<b>DV16VJ7Z</b>	110V	DV16V + side handle + depth stop	BM	4966376286324

**FDV16VB2**  
16mm Impact Drill



Specifications	
Chuck capacity	1.5 - 13mm
Max. Concrete	16mm
Max. Steel	13mm
Max. Wood	25mm
Power Input	550W
No Load Speed	0 - 2900/min
Full Load Impact Rate	27360/min
Overall length	289mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
<b>FDV16VB2J1Z</b>	230V	FDV16VB2 + side handle + depth stop	BM	4966376298358
<b>FDV16VB2J2Z</b>	110V	FDV16VB2 + side handle + depth stop	BM	4966376298365

**DV18V**  
18mm Impact Drill



Specifications	
Chuck capacity	1.5 - 13mm
Max. Concrete	18mm
Max. Steel	13mm
Power Input	690W
No Load Speed	0 - 1000/0 - 3000/min
Full Load Impact Rate	8400/27300/min
Overall length	333mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
<b>DV18VJ6Z</b>	230V	DV18V + side handle + depth stop	IM	4966376287024
<b>DV18VJ7Z</b>	110V	DV18V + side handle + depth stop	IM	4966376287031

**DV20VB2**  
20mm Impact Drill



Specifications	
Chuck capacity	1.5 - 13mm
Max. Concrete	20mm
Max. Steel	13mm
Max. Wood	40mm
Power Input	790W
No Load Speed	0 - 1000/3000/min
Full Load Impact Rate	0 - 8000/26000/min
Overall length	333mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
<b>DV20VB2J6Z</b>	230V	DV20VB2 + side handle + depth stop	IM	4966376287291
<b>DV20VB2J7Z</b>	110V	DV20VB2 + side handle + depth stop	IM	4966376287307

**DV20VD**  
20mm Impact Drill



Specifications	
Chuck capacity	1.5 - 13mm
Max. Concrete	20mm
Max. Steel	13mm
Max. Wood	40mm
Power Input	860W
No Load Speed	0 - 1100/3000/min
Full Load Impact Rate	8100/22000/min
Overall length	363mm
Weight	3.0kg



Variant	Voltage	Contents	Case	GTIN
<b>DV20VDJ6Z</b>	230V	DV20VD + Side handle + depth stop	BM	4966376287468
<b>DV20VDJ7Z</b>	110V	DV20VD + Side handle+ depth stop	BM	4966376287475

**DH26PX2**  
26mm SDS-Plus Rotary Hammer Drill



Specifications	
Capacity Concrete:	
Drill Bit	3.4-26mm
Core Bit	25-50mm
Mild Steel	13mm
Wood	32mm
Power Input	830W
Impact Energy	3.2J
Bit Shank	SDS-plus
No Load Speed	0-1100/min
Full Load Impact Rate	0-4300/min
Overall length	349mm
Weight	2.8kg



Variant	Voltage	Contents	Case	GTIN
<b>DH26PX2J1Z</b>	230V	DH26PX2 + side handle + depth stop	IM	4966376328550
<b>DH26PX2J2Z</b>	110V	DH26PX2 + side handle + depth stop	IM	4966376328567

**DH28PX2**  
28mm SDS-Plus Rotary Hammer Drill



Specifications	
Capacity Concrete:	
Drill Bit	3.4-28mm
Core Bit	25-50mm
Mild Steel	13mm
Wood	32mm
Power Input	850W
Impact Energy	3.4J
Bit Shank	SDS-plus
No Load Speed	0-1100/min
Full Load Impact Rate	0-4300/min
Overall length	360mm
Weight	3.0kg



Variant	Voltage	Contents	Case	GTIN
<b>DH28PX2J1Z</b>	230V	DH28PX2 + side handle + depth stop	IM	4966376328536
<b>DH28PX2J2Z</b>	110V	DH28PX2 + side handle + depth stop	IM	4966376328543



**DH40MC**  
40mm SDS-Max Rotary Demolition Hammer



Specifications

Capacity Concrete:

Drill Bit	40mm
Core Bit	105mm
Power Input	1100W
Impact Energy	8.5J
Bit Shank	SDS-max
No Load Speed	620/min
Full Load Impact Rate	2800/min
Overall length	448mm
Weight	7.1kg



Variant	Voltage	Contents	Case	GTIN
DH40MC	230V	DH40MC + Side handle + depth stop + grease	IM	4966376284580
DH40MC	110V	DH40MC + Side handle + depth stop + grease	IM	4966376284597

**DH40MEY2**  
40mm SDS-Max Rotary Demolition Hammer

**NEW**



Specifications

Capacity Concrete:

Drill Bit	40mm
Core Bit	105mm
Power Input	1150W
Impact Energy	11.0J
Bit Shank	SDS-max
No Load Speed	250 - 500/min
Full Load Impact Rate	1430 - 2850/min
Overall length	477mm
Weight	7.5kg



Variant	Voltage	Contents	Case	GTIN
DH40MEY2J1Z	230V	DH40MEY2 + Side handle + depth stop + grease	IM	4966376407859
DH40MEY2J2Z	110V	DH40MEY2 + Side handle + depth stop + grease	IM	4966376407866



AC Brushless  
**BRUSH  
LESS**  
Brushless Motor

AC Brushless Motor Series

**Everlasting  
efficiency**

Professionals no longer have to worry about losing voltage and power when using a long extension cord. Our AC Brushless Motor Series feature an electronic-circuit control that offers continuous and constant power output. With the innovative AC Brushless Motor you'll experience more power and less energy consumption, and lower heat generation on prolonged tasks.

# Demolition Hammers



## DH45MA 45mm SDS-Max Rotary Demolition Hammer



**LVH**  
LOW VIBRATION HANDLE



Specifications

Capacity Concrete:

Drill Bit	45mm
Core Bit	125mm
Power Input	1400W
Impact Energy	11.3J
Bit Shank	SDS-max
No Load Speed	380/min
Full Load Impact Rate	2900/min
Overall length	535mm
Weight	9.4kg

Variant	Voltage	Contents	Case	GTIN
<b>DH45MAJ1Z</b>	230V	DH45MA + Side handle + stopper + grease	IM	4966376402489
<b>DH45MAJ2Z</b>	110V	DH45MA + Side handle + stopper + grease	IM	4966376402496

## DH45ME 45mm SDS-Max Rotary Demolition Hammer



**FHB**  
FULL ALUMINUM HOUSING BODY

**BRUSH LESS**  
Brushless Motor



Specifications

Capacity Concrete:

Drill Bit	45mm
Core Bit	125mm
Power Input	1500W
Impact Energy	13.4J
Bit Shank	SDS-max
No Load Speed: 110V	120 - 270/min
No Load Speed: 240V	120 - 310/min
Full Load Impact Rate: 110V	1200 - 2500/min
Full Load Impact Rate: 240V	1200 - 2950/min
Overall length	535mm
Weight	9.0kg

Variant	Voltage	Contents	Case	GTIN
<b>DH45MEJ1Z</b>	230V	DH45ME + Side handle + depth stop + grease	IM	4966376284832
<b>DH45MEJ2Z</b>	110V	DH45ME + Side handle + depth stop + grease	IM	4966376284849

**DH52ME**  
52mm SDS-Max Rotary Demolition Hammer



**AHB**  
ALUMINUM HOUSING BODY  
**BRUSH LESS**  
Brushless Motor



Specifications

Capacity Concrete:

Drill Bit	52mm
Core Bit	160mm
Power Input	1500W
Impact Energy	22.0J
Bit Shank	SDS-max
No Load Speed: 110V	110 - 260/min
No Load Speed: 240V	110 - 280/min
Full Load Impact Rate: 110V	1000 - 2200/min
Full Load Impact Rate: 240V	1000 - 2400/min
Overall length	585mm
Weight	11.0kg

Variant	Voltage	Contents	Case	GTIN
<b>DH52MEJ1Z</b>	230V	DH52ME + Side handle + depth stop + grease	IM	4966376285129
<b>DH52MEJ2Z</b>	110V	DH52ME + Side handle + depth stop + grease	IM	4966376285136

**H41MB2**  
SDS-Max Demolition Hammer



**LVH**  
LUBER VERBODEN PROTECTION



Specifications

Power Input	950W
Impact Energy	7.0J
Bit Shank	SDS-max
Full Load Impact Rate	3000/min
Overall length	427mm
Weight	5.24kg

Variant	Voltage	Contents	Case	GTIN
<b>H41MB2J1Z</b>	230V	H41MB2 + Bull point + Side handle	IM	4966376267750
<b>H41MB2J2Z</b>	110V	H41MB2 + Bull point + Side handle	IM	4966376267767

**DH52MA**  
52mm SDS-Max Rotary Demolition Hammer



**LVH**  
LUBER VERBODEN PROTECTION



Specifications

Capacity Concrete:

Drill Bit	52mm
Core Bit	160mm
Power Input	1500W
Impact Energy	15.5J
Bit Shank	SDS-max
No Load Speed	330/min
Full Load Impact Rate	2250/min
Overall length	585mm
Weight	11.8kg

Variant	Voltage	Contents	Case	GTIN
<b>DH52MAJ1Z</b>	230V	DH52MA + Side handle + stopper + grease	IM	4966376402601
<b>DH52MAJ2Z</b>	110V	DH52MA + Side handle + stopper + grease	IM	4966376402618

**H45MEY**  
SDS-Max Demolition Hammer



**AHB**  
ALUMINUM HOUSING BODY  
**LVH**  
LUBER VERBODEN PROTECTION  
**BRUSH LESS**  
Brushless Motor



Specifications

Power Input	1150W
Impact Energy	8.5J
Bit Shank	SDS-max
Full Load Impact Rate	1430 - 2850/min
Overall length	480mm
Weight	7.3kg

Variant	Voltage	Contents	Case	GTIN
<b>H45MEYJ1Z</b>	230V	H45MEY + Bull point + Side handle	IM	4966376288175
<b>H45MEYJ2Z</b>	110V	H45MEY + Bull point + Side handle	IM	4966376288182

**H60MC**  
SDS-Max Demolition Hammer



Specifications	
Power Input	1250W
Impact Energy	22.0J
Bit Shank	SDS-max
Full Load Impact Rate	1600/min
Overall length	570mm
Weight	10.2kg



Variant	Voltage	Contents	Case	GTIN
<b>H60MCJ1Z</b>	230V	H60MC + Bull point + Side handle	BM	4966376288427
<b>H60MCJ2Z</b>	110V	H60MC + Bull point + Side handle	BM	4966376288434

**H60MEY**  
SDS-Max Demolition Hammer



Specifications	
Power Input	1500W
Impact Energy	20.0J
Bit Shank	SDS-max
Full Load Impact Rate	1500 - 2100/min
Overall length	585mm
Weight	12.2kg



Variant	Voltage	Contents	Case	GTIN
<b>H60MEYJ1Z</b>	230V	H60MEY + Bull point + Side handle	IM	4966376288670
<b>H60MEYJ2Z</b>	110V	H60MEY + Bull point + Side handle	IM	4966376288687

**H65SD3**  
28mm SDS-Max Demolition Hammer



Specifications	
Power Input	1340W
Impact Energy	28.0J
Bit Shank	SDS-max
Full Load Impact Rate	1400/min
Overall length	848mm
Weight	20.1kg



Variant	Voltage	Contents	Case	GTIN
<b>H65SD3J2Z</b>	110V	H65SD3 + Side handle	BM	4966376288939



**H90SG**  
28.5mm SDS-Max Demolition Hammer



Specifications	
Power Input	1560W
Impact Energy	70J
Bit Shank	SDS-max
Full Load Impact Rate	1000/min
Overall length	860mm
Weight	32.0kg



Variant	Voltage	Contents	Case	GTIN
<b>H90SGJ2Z</b>	110V	H90SG + wrench	X	4966376289080

**W6VB3**  
6mm Screwdriver



Specifications	
Capacity: Drywall Screw	6mm
Self-Drilling Screw	6mm
Bit Shank	6.35mm (1/4") hex
Power Input	620W
No Load Speed	0 - 2600/min
Overall length	312mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
<b>W6VB3J2Z</b>	110V	W6VB3 +Magnetic bit holder + sub stopper	X	4966376280681

**C7ST**  
185mm Circular Saw



Specifications	
Blade Diameter	185mm
Bore Ø	30mm
Max. Cut Depth 90°	62mm
Max. Cut Depth 45°	47.5mm
Bevel Capacity	0 - 45°
Power Input	1710W
No Load Speed	6000/min
Overall length	310mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
<b>C7STJ1Z</b>	230V	C7ST + blade + guide + wrench	BM	4966376292578
<b>C7STJ2Z</b>	110V	C7ST + blade + guide + wrench	BM	4966376292585

**C7SB3**  
185mm Circular Saw



Specifications	
Blade Diameter	185mm
Bore Ø	30mm
Max. Cut Depth 90°	62mm
Max. Cut Depth 45°	47.5mm
Bevel Capacity	0 - 45°
Power Input	1710W (110V: 1670W)
No Load Speed	6000/min
Overall length	304mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
<b>C7SB3J1Z</b>	230V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376292158
<b>C7SB3J2Z</b>	110V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376292165

**C9U3**  
235mm Circular Saw



Specifications	
Blade Diameter	235mm
Bore Ø	30mm
Max. Cut Depth 90°	86mm
Max. Cut Depth 45°	65mm
Power Input	2000W (110V: 1670W)
No Load Speed	6000/min
Overall length	397mm
Weight	7.2kg



Variant	Voltage	Contents	Case	GTIN
<b>C9U3J6Z</b>	230V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376293469
<b>C9U3J7Z</b>	110V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376293476

**C7U3**  
190mm Circular Saw



Specifications	
Blade Diameter	190mm
Bore Ø	30mm
Max. Cut Depth 90°	66mm
Max. Cut Depth 45°	48mm
Power Input	1300W (110V: 1200W)
No Load Speed	5800/min
Overall length	314mm
Weight	4.7kg



Variant	Voltage	Contents	Case	GTIN
<b>C7U3J6Z</b>	230V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376292653
<b>C7U3J7Z</b>	110V	+ blade + guide + dust adapter + wrench + short lever	BM	4966376292660

**C8FSHG**  
216mm Slide Compound Mitre Saw with LASER



Specifications	
Blade Diameter	185mm
Bore Ø	30mm
Cross Cut 0°	65 x 280/54 x 305mm
Mitre Cut 45°	65 x 203/54 x 210mm
Left Bevel Cut 45°	38 x 280/26 x 305mm
Power Input	1100W
No Load Speed	5300/min
Mitre Angle	48° left/right
Bevel Angle	47° left/2° right
Weight	13.8kg



Variant	Voltage	Contents	Case	GTIN
<b>C8FSHGJ1Z</b>	230V	Blade + dust bag + vice assembly + ext. table + wrench	X	4966376331598
<b>C8FSHGJ2Z</b>	110V	Blade + dust bag + vice assembly + ext. table + wrench	X	4966376331604

**C8FSE**  
216mm Slide Compound Mitre Saw



Specifications	
Blade Diameter	185mm
Bore Ø	30mm
(H x W) Cross Cut 0°	65 x 312mm
Mitre Cut 45°	65 x 220mm
Bevel Cut 45°	45 x 312mm
Compound Mitre Cut 45° and bevel 45°	45 x 220mm
Power Input	1050W
No Load Speed	5500/min
Mitre Angle right/left	0-57° / 0-45°
Bevel Angle right/left	0-5° / 0-48°
Dimensions	565 x 790 x 485mm
Weight	16.4kg



Variant	Voltage	Contents	Case	GTIN
<b>C8FSEJRZ</b>	230V	Blade + dust bag + vice assembly + wrench	X	4966376293100
<b>C8FSEJSZ</b>	110V	Blade + dust bag + vice assembly + wrench	X	4966376293117

**C12RSH2**  
305mm Slide Compound Mitre Saw with LASER



Specifications	
Blade Diameter	305mm
Bore Ø	30mm
(H x W) Cross Cut 0°	105 X 312mm
Mitre Cut Left/Right 45°	105 x 220mm
Bevel Cut 45°	68 x 312mm
Power Input	1520W
No Load Speed	4000/min
Mitre Angle right/left	0-57° / 0-45°
Bevel Angle right/left	0-45° / 0-45°
Dimensions	655 x 890 x 724mm
Weight	27kg



Variant	Voltage	Contents	Case	GTIN
<b>C12RSH2J1Z</b>	230V	Blade + dust bag + vice assembly + wrench	X	4966376291151
<b>C12RSH2J2Z</b>	110V	Blade + dust bag + vice assembly + wrench	X	4966376291168

**C10FCE2**  
255mm Compound Mitre Saw



Specifications	
Blade Diameter	255mm
Bore Ø	30mm
(H x W) Cross Cut 0°	59 x 144mm or 89 x 101mm
Mitre Cut 45°	65 x 220mm or 89 x 70mm
Bevel Cut 45°	41 x 144mm
Compound Mitre Cut 45° and bevel 45°	41 x 102mm
Power Input	1520W
No Load Speed	5000/min
Mitre Angle right/left	0 - 52° / 0 - 52°
Bevel Angle left	0 - 45°
Dimensions	460 x 628 x 561mm
Weight	11.5kg



Variant	Voltage	Contents	Case	GTIN
<b>C10FCE2JMZ</b>	230V	+ dust bag + vice assembly + sub fence + wrench	X	4966376290451
<b>C10FCE2JZZ</b>	110V	+ dust bag + vice assembly + sub fence + wrench	X	4966376290468

**712650**  
Universal Workstation



Specifications	
Weight	27.7kg
Maximum Load	136kg
Maximum width of extension arms	2.35m
Size of extended stand (LxWxH)	1416 x 651 x 916mm

Variant	Case	GTIN
<b>712650Z</b>	X	8717574043532

**CJ90VST2**

Jigsaw



Specifications	
Max. Wood:	90mm
Max. Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Power Input	705W
Length of stroke	26mm
No Load Speed (Stroke)	850 - 3000/min
Overall Length	215mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
<b>CJ90VST2J1Z</b>	230V	CJ90VST2 + blade + wrench	BM	4966376333417
<b>CJ90VST2J2Z</b>	110V	CJ90VST2 + blade + wrench	BM	4966376333424

**CJ160V**

Jigsaw



Specifications	
Max. Wood:	160mm
Max. Aluminium	20mm
Max. Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Power Input	800W
Length of stroke	26mm
No Load Speed (Stroke)	800 - 2800/min
Overall Length	249mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
<b>CJ160VJ1Z</b>	230V	3 blade + splinter guard + chip cover + dust adaptor	BM	4966376293841
<b>CJ160VJ2Z</b>	110V	3 blade + splinter guard + chip cover + dust adaptor	BM	4966376293858

**CJ110MV**

Jigsaw



Specifications	
Max. Wood:	110mm
Max. Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Power Input	720W
Length of stroke	26mm
No Load Speed (Stroke)	850 - 3000/min
Overall Length	246mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
<b>CJ110MVJ1Z</b>	230V	+ blade + splinter guard + chip cover + dust adaptor	BM	4966376293636
<b>CJ110MVJ2Z</b>	110V	+ blade + splinter guard + chip cover + dust adaptor	BM	4966376293643

**Notes**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....



**CR13V2**  
130mm Reciprocating Saw



Specifications	
Max. Pipe	130mm
Max. Steel Plate	19mm
Max. Wood	300mm
Power Input	1010W
Length of stroke	29mm
No Load Speed (Stroke)	0 - 2800/min
Overall Length	435mm
Weight	3.3kg



Variant	Voltage	Contents	Case	GTIN
<b>CR13V2J1Z</b>	230V	CR13V2 + blade + wrenches	BM	4966376282272
<b>CR13V2J2Z</b>	110V	CR13V2 + blade + wrenches	BM	4966376282289

**CV350V**  
Multi Tool



Specifications	
Oscillation Frequency:	
Standard Mode (Dial 1-5)	6000 - 20000/min
AUTO Mode (Dial A)	15000 - 20000/min
Power Input	350W
Length of stroke	32mm (1-1/4")
Oscillation Angle	3.2°
Overall Length	280mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
<b>CV350VJ3Z</b>	230V	CV350V (Tool only)	X	4966376294619

**CR13VBY**  
130mm Reciprocating Saw



Specifications	
Max. Pipe	130mm
Max. Steel Plate	19mm
Max. Wood	300mm
Power Input	1150W
Length of stroke	32mm (1-1/4")
No Load Speed (Stroke)	0 - 3000/min
Overall Length	465mm
Weight	4.4kg



Variant	Voltage	Contents	Case	GTIN
<b>CR13VBYJ1Z</b>	230V	CR13VBY + blade	BM	4966376282432
<b>CR13VBYJ2Z</b>	110V	CR13VBY + blade	BM	4966376282449

**Notes**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

**M8V2**

1/4" Router



Specifications

Capacity Collet Chuck:	6.35mm (1/4")
Plunge Depth	60mm
Power Input	1150W
No Load Speed (Stroke)	11000 - 25000/min
Weight	3.6kg



Variant	Voltage	Contents	Case	GTIN
<b>M8V2J1Z</b>	230V	M8V2 + straight guide + template guide + wrench	BM	4966376295500

**M12VE**

1/2" Router



Specifications

Capacity Collet Chuck:	12.7mm (1/2")
Plunge Depth	65mm
Power Input	2000W (230V) 1570W (110V)
No Load Speed (Stroke)	8000 - 22000/min
Weight	5.3kg



Variant	Voltage	Contents	Case	GTIN
<b>M12VEJ6Z</b>	230V	M12VE + straight guide + template guide + wrench	BM	4966376295319
<b>M12VEJ7Z</b>	110V	M12VE + straight guide + template guide + wrench	BM	4966376295326

**P20SF**

Planer



Specifications

Cutting Width	82mm
Max. Cutting Depth	2.6mm
Power Input	620W
No Load Speed (Stroke)	1700/min
Overall Length	296mm
Weight	2.5kg

Variant	Voltage	Contents	Case	GTIN
<b>P20SFJ1Z</b>	230V	P20SF + blade setting gauge + guide + wrench	BM	4966376295951

**Notes**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

**SV13YA**  
125mm Random Orbit Sander



Specifications	
Capacity Sanding Pad	125mm
Orbit Diameter	3.2mm
Power Input	230W
No Load Speed	7000 - 12000/min
Overall Length	145mm
Weight	1.4kg



Variant	Voltage	Contents	Case	GTIN
<b>SY13YA1Z</b>	230V	SV13YA + sanding paper + dust bag	BM	4966376279845
<b>SY13YA2Z</b>	110V	SV13YA + sanding paper + dust bag	BM	4966376279852

**SB8V2**  
76mm Belt Sander



Specifications	
Capacity: Belt Size	76 x 533mm
Power Input	1020W
No Load Belt Speed	250 - 450m/min
Overall Length	318mm
Weight	4.5kg



Variant	Voltage	Contents	Case	GTIN
<b>SB8V21Z</b>	230V	SB8V2 + sanding belt + dust bag	X	4966376296743
<b>SB8V22Z</b>	110V	SB8V2 + sanding belt + dust bag	X	4966376296750

**SV12SG**  
Palm Sander



Specifications	
Capacity Sanding Pad	110 x 100mm
Orbit Diameter	1.5mm
Power Input	200W
No Load Speed: Spindle	14000/min
No Load Speed: Orbit	28000/min
Overall Length	137mm
Weight	1.1kg



Variant	Voltage	Contents	Case	GTIN
<b>SV12SG1Z</b>	230V	SV12SG + sanding paper + dust bag + punch plate	X	4966376279555
<b>SV12SG2Z</b>	110V	SV12SG + sanding paper + dust bag + wrench	X	4966376279562

**SB10V2**  
100mm Belt Sander



Specifications	
Capacity: Belt Size	100 x 610mm
Power Input	1020W
No Load Belt Speed	250 - 420m/min
Overall Length	363mm
Weight	5.4kg



Variant	Voltage	Contents	Case	GTIN
<b>SB10V21Z</b>	230V	SB10V2 + sanding belt + dust bag	X	4966376296590
<b>SB10V22Z</b>	110V	SB10V2 + sanding paper + dust bag + wrench	X	4966376296606

**SP18VA**  
Sander/Polisher



Specifications	
Capacity Sanding Disc	180mm
Wool Bonnet	180mm
Spindle Thread	M14 x 2
Power Input	1250W
No Load Speed	0 - 3400/min
Overall Length	415mm
Weight	2.8kg



Variant	Voltage	Contents	Case	GTIN
<b>SP18VAJ1Z</b>	230V	SP18VA + loop handle + rubber pad + wool bonnet + sanding disc + wrench	X	4966376279197
<b>SP18VAJ2Z</b>	110V		X	4966376279203

**G12STX**  
115mm Angle Grinder



Specifications	
Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11500/min: 230V 12000/min: 110V
Overall Length	254mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
<b>G12STXJ5Z</b>	230V	G12STX + Side handle + wrench	X	4966376273225
<b>G12STXJ6Z</b>	110V	G12STX + Side handle + wrench	X	4966376273232

**G10SR4**  
100mm Angle Grinder



Specifications	
Capacity Wheel Diameter	100mm
Hole Diameter Ø	16mm
Spindle Thread	M10 x 1.5
Power Input	730W
No Load Speed	10000/min
Overall Length	258mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
<b>G10SR4J5Z</b>	230V	G10SR4 + side handle + wrench	X	4966376271887
<b>G10SR4J6Z</b>	110V	G10SR4 + side handle + wrench	X	4966376271894

**G12STX/CD**  
115mm Angle Grinder Kit



Specifications	
Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11500/min: 230V 12000/min: 110V
Overall Length	254mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
<b>G12STXJ7Z</b>	230V	G12STX + diamond wheel + Side handle + wrench	BM	4966376273249
<b>G12STXJ8Z</b>	110V	G12STX + diamond wheel + Side handle + wrench	BM	4966376273256



**G12SR4**  
115mm Angle Grinder



Specifications

Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	730W
No Load Speed	10000/min
Overall Length	258mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
<b>G12SR4J5Z</b>	230V	G12SR4 + Side handle + wrench	X	4966376272938
<b>G12SR4J6Z</b>	110V	G12SR4 + Side handle + wrench	X	4966376277294

**G12SE3**  
115mm Angle Grinder



Specifications

Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	1400W: 230V 1200W: 110V
No Load Speed	11500/min
Overall Length	328mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
<b>G12SE3J1Z</b>	230V	G12SE3 + abrasive wheel + side handle + wrench	X	4966376331550
<b>G12SE3J2Z</b>	110V	G12SE3 + abrasive wheel + side handle + wrench	X	4966376331567

**G12SN2**  
115mm Angle Grinder



Specifications

Capacity Wheel Diameter	115mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	900W
No Load Speed	10500/min
Overall Length	266mm
Weight	2.0 kg



Variant	Voltage	Contents	Case	GTIN
<b>G12SN2J5Z</b>	230V	G12SN2 + side handle + wrench	X	4966376272716
<b>G12SN2J6Z</b>	110V	G12SN2 + side handle + wrench	X	4966376272723

**G13SE3**  
125mm Angle Grinder



Specifications

Capacity Wheel Diameter	125mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	1400W: 230V 1200W: 110V
No Load Speed	11500/min
Overall Length	328mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
<b>G13SE3J1Z</b>	230V	G13SE3 + abrasive wheel + side handle + wrench	X	4966376331468
<b>G13SE3J2Z</b>	110V	G13SE3 + abrasive wheel + side handle + wrench	X	4966376331475

**G18SE4**  
180mm Angle Grinder



Specifications	
Capacity Wheel Diameter	180mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	8500/min
Overall Length	492mm
Weight	5.98kg



Variant	Voltage	Contents	Case	GTIN
<b>G18SE4J1Z</b>	230V	G18SE4 + Side handle + wrench	X	4966376326136

**G23ST/CD**  
230mm Angle Grinder Kit



Specifications	
Capacity Wheel Diameter	230mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2000W
No Load Speed	6600/min
Overall Length	469mm
Weight	5.1kg



Variant	Voltage	Contents	Case	GTIN
<b>G23STCDJ1Z</b>	230V	G23ST + diamond wheel + side handle + wrench	BM	5017658063986
<b>G23STCDJ2Z</b>	110V	G23ST + diamond wheel + side handle + wrench	BM	5017658063993

**G23ST**  
230mm Angle Grinder



Specifications	
Capacity Wheel Diameter	230mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2000W
No Load Speed	6600/min
Overall Length	469mm
Weight	5.1kg



Variant	Voltage	Contents	Case	GTIN
<b>G23STJ1Z</b>	230V	G23ST + side handle + wrench	X	4966376276677
<b>G23STJ2Z</b>	110V	G23ST + side handle + wrench	X	4966376276684

**G23ST/G12STX**  
230mm + 115mm Grinder Twin Pack



Includes:  
G23ST: 230mm Angle Grinder  
G12STX: 115mm Angle Grinder  
Diamond balde  
Case



Variant	Voltage	Contents	Case	GTIN
<b>G23ST/G12STXCDJ1Z</b>	230V	G23ST + G12STX + side handles + wrenches	BM	5017658065034
<b>G23ST/G12STXCDJ2Z</b>	110V	G23ST + G12STX + side handles + wrenches	BM	5017658065401

**G23SC4**  
230mm Angle Grinder



Specifications	
Capacity Wheel Diameter	230mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	6600/min
Overall Length	492mm
Weight	6.1kg



Variant	Voltage	Contents	Case	GTIN
<b>G23SC4J1Z</b>	230V	G23SC4 + Side handle + wrench	X	4966376326020
<b>G23SC4J2Z</b>	110V	G23SC4 + Side handle + wrench	X	4966376326037

**G23MR**  
230mm Angle Grinder (Aluminium Body)



Specifications	
Capacity Wheel Diameter	230mm
Hole Diameter Ø	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	6600/min
Overall Length	492mm
Weight	5.4kg



Variant	Voltage	Contents	Case	GTIN
<b>G23MRJ1Z</b>	230V	G23MR + side handle + wrench	X	4966376276073
<b>G23MRJ2Z</b>	110V	G23MR + side handle + wrench	X	4966376276080

**GP2S2**  
Die Grinder



Specifications	
Capacity Collet Chuck	6mm
Max. Wheel Diameter Ø	25mm
Spindle Thread	M14 x 2
Power Input	520W
No Load Speed	29000/min
Overall Length	360mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
<b>GP2S2J2Z</b>	110V	GP2S2	X	4966376277575

Mounted point not included

**CC14SF**  
355mm Cut-off Machine



Specifications	
Wheel Diameter	355mm
Wheel Bore Ø	25.4mm
Capacity Bar Diameter	65mm
Pipe Diameter	100mm
Shaped steel	100 x 100mm
Power Input	2000W
No Load Speed	3800/min
Dimensions (LxWxH)	603 x 318 x 603mm
Weight	16.5kg



Variant	Voltage	Contents	Case	GTIN
<b>CC14SFJ1Z</b>	230V	CC14SF + wrench	X	4966376281312
<b>CC14SFJ2Z</b>	110V	CC14SF + wrench	X	4966376281329

**NT50AE2**  
50mm Brad Nailer




Specifications	
Driving system	Piston Reciprocating Action
Operating Pressure Range	4.9-8.3 bar (70-120psi)
Driving Speed	3 nails/sec.
Nail Size	18 gauge
Nail Length	16-50mm
Loading Capacity	100 nails
Air Inlet	NPT 1/4 Thread
Dimensions (L x H)	254 x 233mm
Weight	1.0kg

Notes

A series of horizontal dotted lines for taking notes, starting below the 'Notes' header and extending across the right side of the page.

Variant	Contents	Case	GTIN
NT50AE2L2Z	NT50AE2 + nose cap + safety glasses	BM	4966376297160



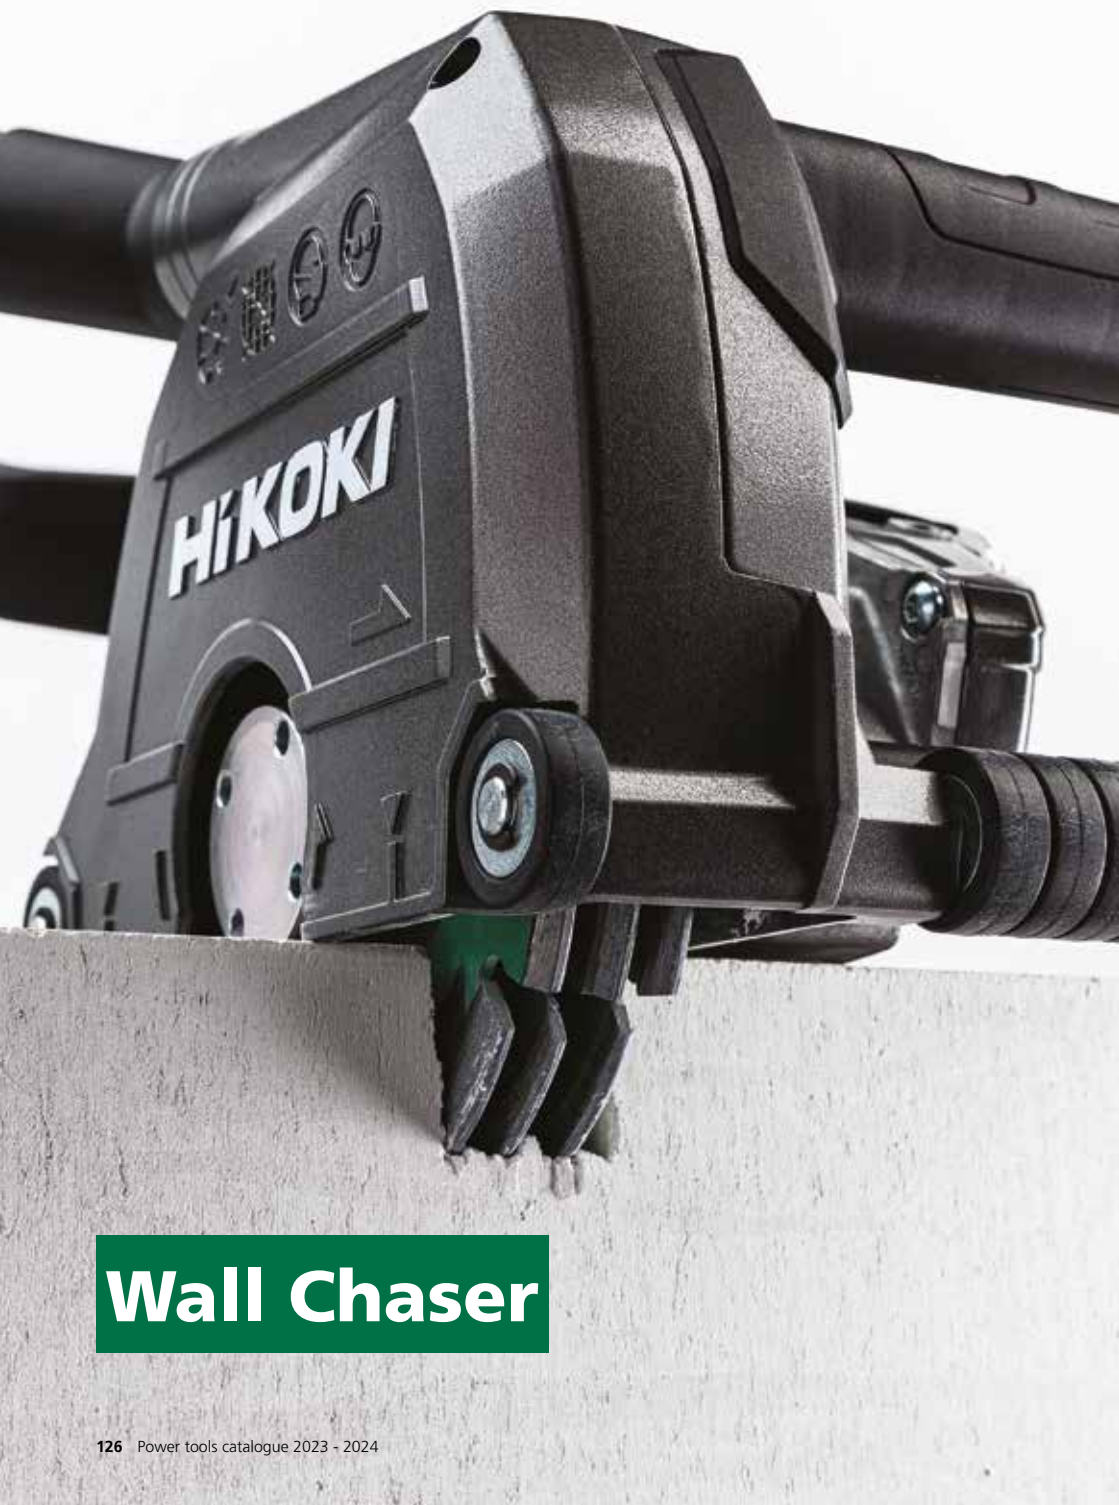

# Wall Chaser

## CM5MA 1900W Wall Chaser

**NEW**



Specifications	
Max. cutting depth	40mm
Max. cutting width	35mm
No load speed	5000/min
Max. blade diameter	125mm
Torque	6Nm
Spindle thread	M14
Rated input power	1900W
Vibrations	5.5 m/s <sup>2</sup>
Cutting direction	Push
Restart protection	YES
Constant speed	YES
Overload protection	YES
Soft start	YES
Dimensions (LxWxH)	480 x 195 x 175mm
Weight	4.7kg



Variant	Voltage	Contents	Case	GTIN
CM5MAJ1Z	230V Only	CM5MA + Diamond cut-off wheels + chase chisel + 2-hole spanner + distance washers + case	BM	4966376338542



Available as an accessory - not included as standard

4100299	Diamond Disc (3 Row)
---------	----------------------



# HiKOKI glossary.

## **MV** Compatible

MULTI VOLT is the most intelligent 36V battery system yet. It combines the best high-performance power tools with our most powerful batteries and accessories for your consistently high performance. One battery pack, two voltages - depending on the tool - the voltage automatically switches to 18V or 36V, making it compatible with tools of both voltages.

## **BRUSHLESS**

Due to a more compact design than brushed motors, brushless motors allow for smaller and lighter tools. Even under heavy use, the brushless motors significantly extend the product's service life without the inconvenience of armature burn-out, short circuits or commutator wear. Plus, they do not require the regular replacement of carbon brushes.

## **RFC**

When the tool bit is suddenly overburdened during operation, Reactive Force Control stops the motor to reduce twisting of the main unit preventing user injuries.

## **AHB**

An internal double-insulation construction with a very sturdy aluminium die-cast body is incorporated to make the housing more rigid enhancing the durability of the motor unit significantly.

## **LVP**

Our original, spring-type dynamic vibration absorber with a weight and two springs/spring leaf moves in the opposite direction to the vibration direction of the main body. This results in reduced vibration and improved operating efficiency.

## **LVH**

Low Vibration Handle consists of rubber dampers and/or hinges to reduce vibration and user fatigue.

## **TRIPLE HAMMER**

Triple hammer reduces vibration by making three impacts per rotation instead of the conventional two. The results are lower vibration levels, greater operator comfort, and ease of use with less cam-out.

## **IP54 IP55 IP56 IP65**

The IP-code rates the degree of protection against dust and water ingress. HiKOKI tools that are IP-rated come with silicon-coated electronics protecting the tool.

**IP54:** Protected against dust. Protected against splash water.

**IP55:** Protected against dust. Protected against water jets.

**IP56:** Protected against dust. Protected against powerful water jets.

**IP65:** Completely dust tight. Protected against water jets.

## **AIR SPRING DRIVE SYSTEM**

Our unique Air Spring Drive System uses the compressed air sealed in the main unit. It drives up to 3 nails per second with zero ramp-up time, and it sets nails flush consistently without combustion noise or gas fumes.

## **LED LEVEL**

LED level indicates if tool is held straight to achieve precisely drilled holes.



# **HiKOKI**

**HIGH PERFORMANCE POWER TOOLS**

**HiKOKI Power Tools (UK) Ltd**

25 Majestic Road  
Nursling Industrial Estate  
Southampton  
SO16 0YT

Email: [info@hikoki-powertools.co.uk](mailto:info@hikoki-powertools.co.uk)

**Follow us on our socials and never  
miss out on HiKOKI news.**



[www.hikoki-powertools.co.uk](http://www.hikoki-powertools.co.uk)